

## LM1951 Solid State 1 Amp Switch

### General Description

The LM1951 is a high current, high voltage, high side (PNP) switch with a built-in error detection circuit.


The LM1951 is guaranteed to deliver 1 Amp output current and is capable of withstanding up to  $\pm 85V$  transients. The built-in error detection provides an error flag output under the following fault conditions: output short to ground or supply, open load, current limit, overvoltage or thermal shutdown. The LM1951 will drive all types of resistive or inductive loads. The output has a built-in negative voltage clamp ( $\approx -30V$ ) to provide a quick energy discharge path for inductive loads. The LM1951 features TTL and CMOS compatible logic input with hysteresis. Switching times, both turn on and turn off, are  $2 \mu s$  ( $C_{load} < 0.005 \mu F$ ). In addition, its quiescent current in the OFF state is typically less than  $0.1 \mu A$  at room temperature and less than  $10 \mu A$  over the entire operating temperature and voltage range.

The LM1951 features make it well suited for industrial and automotive applications.

### Features

- 0.1  $\mu A$  typical quiescent current (OFF state)
- 1 Amp output current guaranteed
- $\pm 85V$  transient protection
- Reverse voltage protection
- Negative output voltage clamp
- Error flag output
- Internal overvoltage shutdown
- Internal thermal shutdown
- Short circuit proof
- High speed switching (up to 50 kHz)
- Inductive or resistive loads
- Low ON resistance ( $1\Omega$  maximum)
- TTL, CMOS compatible input with hysteresis
- Plastic TO-220 5-lead package
- ESD protected
- 4.5V to 26V operation


### Typical Application Circuit and Connection Diagram

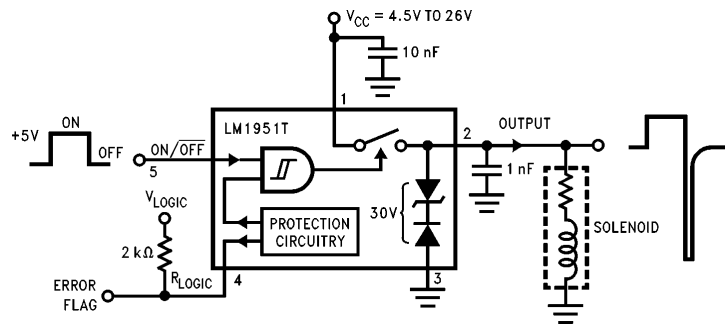

TL/H/9133-1

$V_{IN}$	Output
0	OFF
1	ON

#### TO-220, 5-Lead

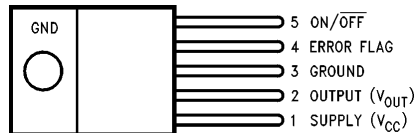

TL/H/9133-2

**Front View**  
**Order Number LM1951T**  
**See NS Package Number T05A**

## Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage		
Operational Voltage		26 V <sub>DC</sub>
Sustained Voltage	-40 V <sub>DC</sub> ≥ V <sub>CC</sub> ≤ 85 V <sub>DC</sub>	
Transient Voltage Protection		±85V
(τ = 100 ms, 1% Duty Cycle, R <sub>S</sub> ≥ 10Ω)		
Pins 4, 5		26 V <sub>DC</sub>

Power Dissipation (Note 1)	Internally Limited
Load Inductance	1H
Operating Temperature Range (T <sub>A</sub> )	-40°C to +125°C
Maximum Junction Temperature	150°C
Storage Temperature Range	-65°C to +150°C
Lead Temperature (Soldering, 10 sec.)	260°C
ESD Tolerance (Note 4):	2000V

## Electrical Characteristics

V<sub>CC</sub> = 12V, I<sub>out</sub> = 500 mA, C<sub>out</sub> = 0.001 μF, T<sub>A</sub> = 25°C unless otherwise specified

Parameter	Conditions	Typical	Tested Limit (Note 2)	Design Limit (Note 3)	Units		
Supply Voltage, V <sub>CC</sub>			4.5		V <sub>min</sub>		
			Operational	26		V <sub>max</sub>	
			Transient	τ = 100 ms, 1% Duty Cycle, R <sub>CC</sub> ≥ 10Ω	-85		V
					85		V
Supply Current	I <sub>out</sub> = 0 mA, V <sub>ON/OFF</sub> = 0.8V	0.1	10	100	μA <sub>max</sub>		
			I <sub>out</sub> = 250 mA, V <sub>ON/OFF</sub> = 2.0V	260	270	mA <sub>max</sub>	
			I <sub>out</sub> = 600 mA, V <sub>ON/OFF</sub> = 2.0V	630	650	mA <sub>max</sub>	
			I <sub>out</sub> = 1A, V <sub>ON/OFF</sub> = 2.0V	1.06	1.2	A <sub>max</sub>	
Voltage Drop (V <sub>CC</sub> - V <sub>OUT</sub> )	I <sub>out</sub> = 600 mA, V <sub>ON/OFF</sub> = 2.0V	400	600		mV <sub>max</sub>		
			I <sub>out</sub> = 1A, V <sub>ON/OFF</sub> = 2.0V	0.7	1.0	V <sub>max</sub>	
Short Circuit Current	V <sub>OUT</sub> = 0V, V <sub>ON/OFF</sub> = 2V	1.3	1.0		A <sub>min</sub>		
			2.5		A <sub>max</sub>		
Input Threshold, Pin 5	4.5V ≤ V <sub>CC</sub> ≤ 26V	Turn ON	1.4	2.0	2.0	V <sub>max</sub>	
			Turn OFF	1.2	0.8	0.8	V <sub>min</sub>
Input Current, Pin 5	0.8V ≤ V <sub>ON/OFF</sub> ≤ 5.5V	25	50		μA <sub>max</sub>		
			10		μA <sub>min</sub>		
Output Clamp	I <sub>out</sub> ≤ 600 mA	-30	-40		V <sub>min</sub>		
			-24		V <sub>max</sub>		
Delay Time	R <sub>load</sub> = 20Ω, C <sub>load</sub> = 0.001 μF		1	3		μs <sub>max</sub>	
			t <sub>d, ON</sub>	1	3		μs <sub>max</sub>
Rise Time			1	3		μs <sub>max</sub>	
Fall Time			1	3		μs <sub>max</sub>	
Error Flag Characteristics: Output Voltage	Error Condition, Pin 4 Low, Sinking 10 mA	0.3	0.8		V <sub>max</sub>		
Sink Current	Error Condition, Pin 4 = 0.3V	10	3		mA <sub>min</sub>		
Output Leakage Current	No Error, Pin 4 = 26V	0.01	1		μA <sub>max</sub>		
Response Time	V <sub>LOGIC</sub> = 5V, R <sub>LOGIC</sub> = 2 kΩ, C <sub>LOGIC</sub> = 0 μF	1			μs		












**Note 1:** Thermal resistance junction-to-case is 3°C/W. Thermal resistance case-to-ambient is 50°C/W.

**Note 2:** Tested Limits are guaranteed and 100% production tested.

**Note 3:** Design Limits are guaranteed (but not 100% production tested) over the operating temperature and supply voltage range. These limits are not used to calculate outgoing quality levels.




**Note 4:** Human body model, 100 pF discharged through a 1.5 kΩ resistor.

# Typical Performance Characteristics

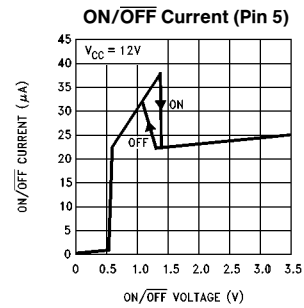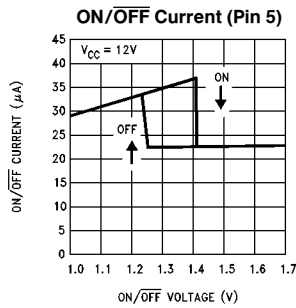

TL/H/9133-3

## Error Flag Output Characteristics



TL/H/9133-13

## Truth Table

Fault Condition	V <sub>ON/OFF</sub> *	V <sub>out</sub>	Error Flag
Normal	L	L	H
	H	H	H
Overvoltage	L	L	L
	H	L	L
Thermal Shutdown	L	L	L
	H	L	L
V <sub>OUT</sub> Short to GND	L	L	H
	H	L	L
V <sub>OUT</sub> Short to V <sub>supply</sub>	L	H	L
	H	H	L
Open Load	L	L	H
	H	H	L
Current Limit	L	L	H
	H	H	L

\* L  $\approx$  0  $\leq$  V<sub>ON/OFF</sub>  $\leq$  0.8V    H  $\approx$  2V  $\leq$  V<sub>ON/OFF</sub>  $\leq$  26V

## Typical Applications

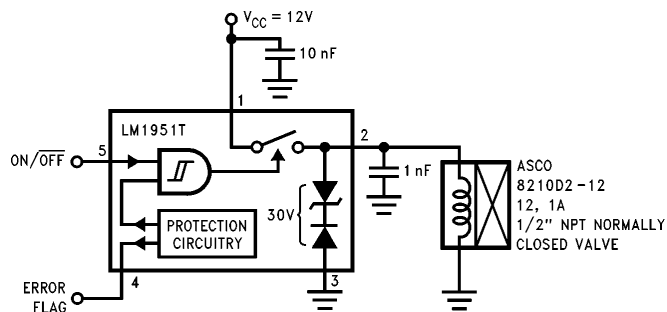


FIGURE 1. Solenoid Actuated Valve

TL/H/9133-4


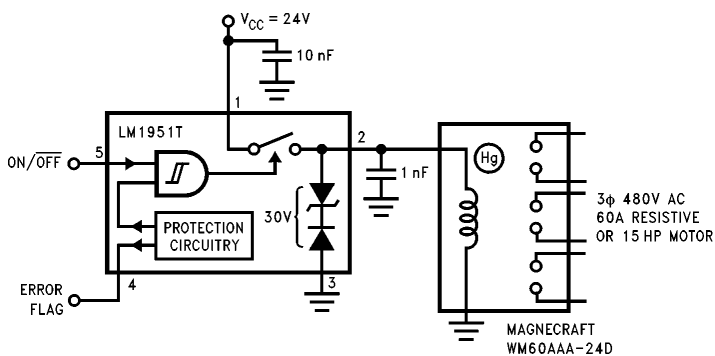


FIGURE 2. 60A 3-Phase Mercury Displacement Relay

TL/H/9133-5

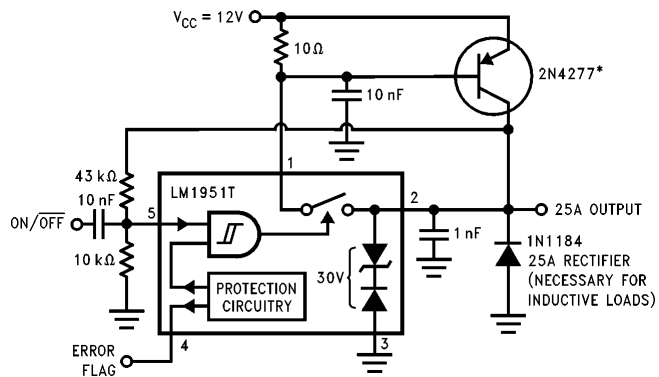


\* Available from Germanium Power Devices, Andover, MA, Tel. (617) 475-5982

FIGURE 3. 25A Switch with Short Circuit Foldback


TL/H/9133-6

**Typical Applications** (Continued)

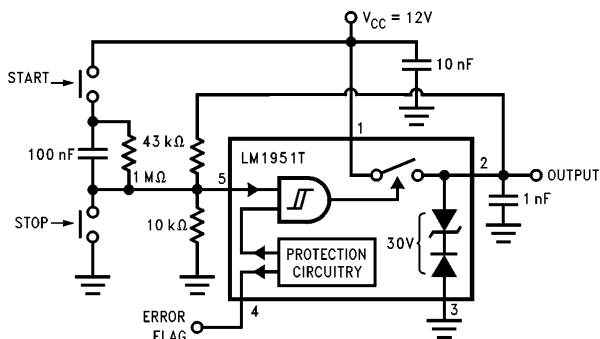


**FIGURE 4. Latching Switch**

TL/H/9133-7

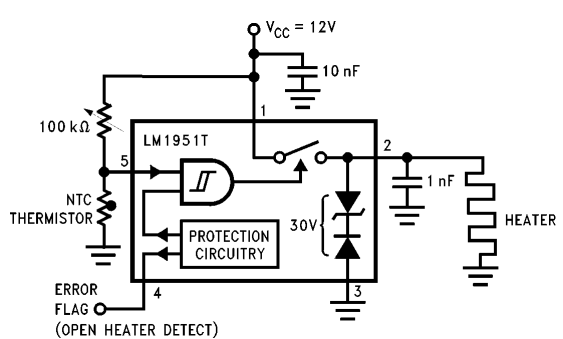

**FIGURE 5. Temperature Controller with Hysteresis**

TL/H/9133-8

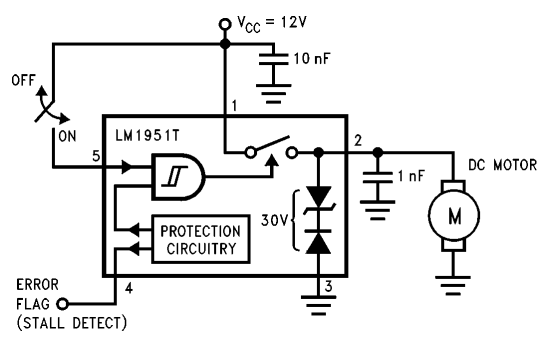

**FIGURE 6. DC Motor Driver**

TL/H/9133-9

## Typical Applications (Continued)


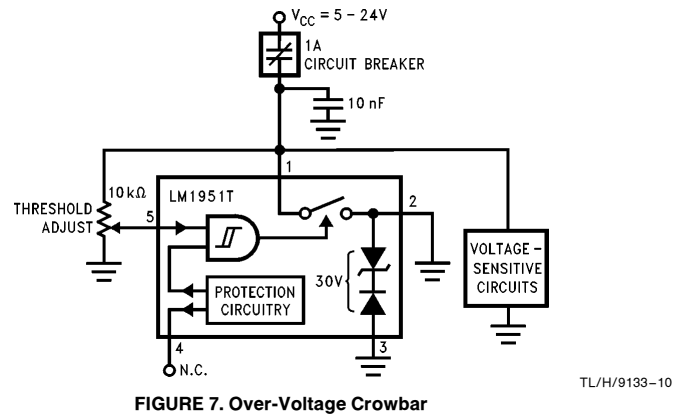


FIGURE 7. Over-Voltage Crowbar

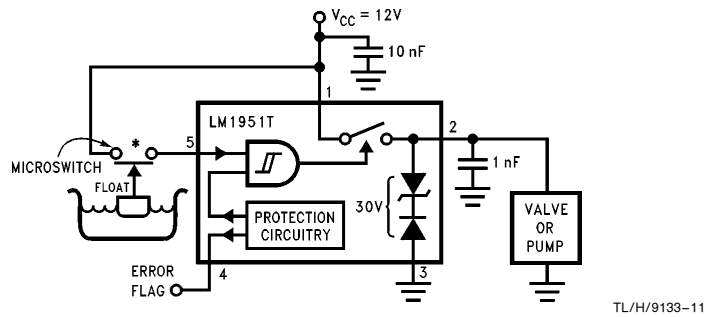

Operation	Switch Type
Empty	Normally Open
Fill	Normally Closed

FIGURE 8. Fluid Level Controller

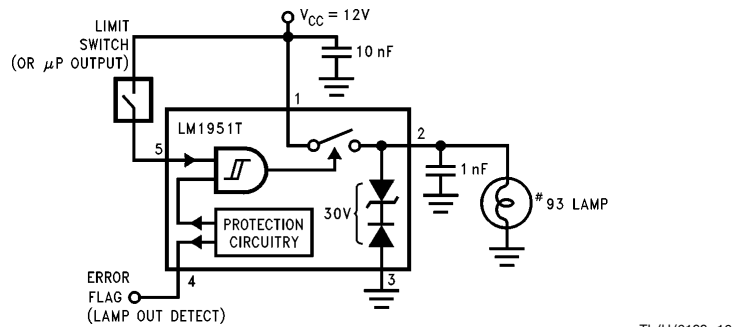


FIGURE 9. Indicator Lamp Driver

## Application Hints

When inductive loads are turned OFF, they produce a negative voltage spike. The LM1951 contains a voltage clamp that limits these spikes to approximately  $-30V$ , thus an external clamp is not necessary in most applications.

Loads with an inductance of greater than  $1H$ , driven to full output current, may damage the clamp simply by exceeding the power capabilities of the LM1951. An LM1951 can dissipate  $25W$  continuous at  $25^{\circ}C$  ambient when mounted on a large heatsink. If the load current is limited to  $800\text{ mA}$ , the sustained spike from an infinitely large inductance can be handled. Sustained spikes produced by higher currents and high inductances will exceed the  $25W$  limit.

For inductances above  $1H$ , care should be taken to see that the output current does not exceed a value that could damage the clamp. While  $800\text{ mA}$  is acceptable for the device running at  $25^{\circ}C$  ambient on a heatsink, derate this current for smaller heatsinks or higher ambient temperatures to limit the junction temperature to  $150^{\circ}C$ . Alternatively, an external clamp or resonating capacitor can be added to handle any combination of load inductance, load current, and device temperature. This is especially important if the output current is boosted, such as the application shown in *Figure 3*. A peak power of  $750W$  could be developed in the internal clamp if an inductive load is switched without external clamping.

Another case where the clamp's power capability may be exceeded is when driving a solenoid. The inductance of a solenoid is greatest when energized, with the plunger pulled in. As the plunger is pulled out of the solenoid, the inductance goes down. Under certain conditions of high solenoid inductance and fast mechanical time constants, the current may actually **increase** when the solenoid is turned OFF. Since the energy stored in an inductor cannot change instantaneously, the current must increase to conserve energy when the inductance decreases. This condition is traced by observing the load current with a current probe and storage oscilloscope.

Load capacitances larger than  $1\text{ nF}$  will slow rise and fall times. Inductive loads having a capacitive component larger than  $1\text{ nF}$  will also exhibit overshoot. Furthermore, ringing

may be evident in a combination inductive/capacitive load, or in an inductive load with supply decoupling capacitors in the range of  $100\text{ nF}$  to  $1\text{ }\mu\text{F}$ . For fast rise and fall times and minimum ringing with inductive loads, a supply decoupling capacitor of  $10\text{ nF}$  and an output capacitor of  $1\text{ nF}$  is recommended. These should be located as close to the IC pins as possible.

The error flag is an open collector output that pulls low under certain fault conditions. These errors include overvoltage ( $V_{CC} > 26V$ ), overcurrent ( $I_{OUT} > 1.3A$ ), undercurrent ( $I_{OUT} < 2\text{ mA}$ ), output short circuit to ground, output short circuit to supply, and junction temperature greater than  $150^{\circ}C$ . By connecting a  $2\text{ k}\Omega$  resistor from the error flag output to a  $5V$  supply a logic output to a microprocessor is provided.

The error flag can give seemingly false indications in a number of situations. Slewing large capacitive loads ( $>100\text{ nF}$ ) can drive the LM1951 into temporary current limit, producing a momentary error indication. Incandescent lamps and DC motors require an inrush current that will also cause a temporary current limit and error indication. Large inductive loads ( $>50\text{ mH}$ ) initially appear as open circuits, falsing the error flag. The error flag pulses for about  $1\text{ }\mu\text{s}$  when any load is turned ON since the output is initially at ground. In microprocessor systems these false indications are easily ignored in software. In discrete logic circuits utilizing a latch at the error flag output, some filtering may be required.

An internal current sink ( $10\text{ }\mu\text{A}$  minimum) is connected to the input, pin 5. If this pin is left open it is guaranteed to pull low, switching the LM1951 OFF. This characteristic is important under certain fault conditions such as when the control line fails open circuit.


Although the input threshold has hysteresis, the switch points are derived from a very stable band-gap reference. In many applications, such as *Figures 5* and *7*, the LM1951 input can replace an external reference and comparator.

The input (pin 5) is clamped at  $-0.7V$  and includes a series resistance of approximately  $30\text{ k}\Omega$ . This pin tolerates negative inputs of up to  $1\text{ mA}$  without affecting the performance of the chip.





**Physical Dimensions** inches (millimeters)

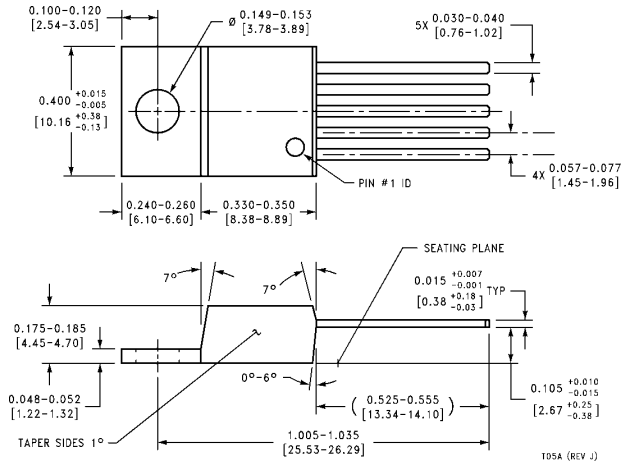

Outline Drawing  
 Order Number LM1951T  
 NS Package Number T05A

T05A (REV J)

**LIFE SUPPORT POLICY**

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**  
 1111 West Bardin Road  
 Arlington, TX 76017  
 Tel: 1(800) 272-9959  
 Fax: 1(800) 737-7018

**National Semiconductor Europe**  
 Fax: (+49) 0-180-530 85 86  
 Email: cnjwge@tevm2.nsc.com  
 Deutsch Tel: (+49) 0-180-530 85 85  
 English Tel: (+49) 0-180-532 78 32  
 Français Tel: (+49) 0-180-532 93 58  
 Italiano Tel: (+49) 0-180-534 16 80

**National Semiconductor Hong Kong Ltd.**  
 19th Floor, Straight Block,  
 Ocean Centre, 5 Canton Rd.  
 Tsimshatsui, Kowloon  
 Hong Kong  
 Tel: (852) 2737-1600  
 Fax: (852) 2736-9960

**National Semiconductor Japan Ltd.**  
 Tel: 81-043-299-2309  
 Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.