


**PROFET**

**BTS 412 A**

- High-side switch
- Short-circuit protection
- Overtemperature protection
- Overload protection
- Input protection
- Open-load detection in off-condition
- Undervoltage shutdown
- Negative transient voltage peak at inductive load limited to - 10 V
- In case of a fault, the outputs trips and remains open
- Status output
- In case of a fault, the status changes from "H" to "L" and remains on "L"
- Restart:  $V_{in (off)}/V_{in (on)}$



Type	Ordering code
BTS 412 A	C67078-A5300-A5

**Maximum Ratings**

Parameter	Symbol	Values	Unit
Breakdown voltage	$V_{bb(BR)}$	45	V
Short-circuit current	$I_{SC}$	self-limited	-
Max. power dissipation	$P_{tot}$	75	W
Operating and storage temperature range	$T_j$ $T_{stg}$	- 55 ... + 150	°C
Thermal resistance Chip - case Chip - ambient	$R_{th JC}$ $R_{th JA}$	1.67 50	K/W

**Electrical Characteristics** (continued)  
at  $T_j = 25\text{ °C}$ , unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
On-state resistance (pin 3 to 5) $V_{bb} = 24\text{ V}$ , $I_L = 2\text{ A}$ $V_{bb} = 12\text{ V}$ , $V_{in} = 3.5\text{ V}$	$R_{on}$	-	0.25	0.29	$\Omega$
		-	0.35	0.40	
Operating voltage (pin 3 to 1)	$V_{bb}$	7	-	35	V
Load current, (pin 5 to 1) $T_C = 25\text{ °C}$ , $V_{bb} = 24\text{ V}$	$I_L$	-	-	11	A
Short-circuit current $V_{bb} = 12\text{ V}$	$I_{SC}$	-	25	-	
Standby current (pin 3 to 1 and 5) (with and without load) $V_{bb} = 12\text{ V}$ , $T_j = 25\text{ °C}$ $T_j = 115\text{ °C}$	$I_R$	-	-	20	mA
		-	-	0.25	
Input voltage (pin 2 to 1) $V_{bb} = 12\text{ V}$	$V_{in(off)}$ $V_{in(on)}$	-0.5	-	1.5	V
		3	-	35	
Input current (pin 2 to 1) $V_{in(off)} = 0.4\text{ V}$ $V_{in(on)} = 3.5\text{ V}$	$I_{in(off)}$ $I_{in(on)}$	1	-	20	$\mu\text{A}$
		3	-	50	
Input capacitance (pin 2 to 1), $V_{in} = 0$	$C_{in}$	-	2	-	pF
Trip temperature automatic tripping when $T_j \geq 150\text{ °C}$	$T_t$	150	-	-	$^{\circ}\text{C}$
Turn-on time	$t_{on}$	15	-	60	$\mu\text{s}$
Turn-off time	$t_{off}$	5	-	30	
Switching edge $V_{bb} = 12\text{ V}$ , $I_L = 2\text{ A}$	$dv/dt$	-	-	10	V/ $\mu\text{s}$
Status $I_{St} = 50\text{ }\mu\text{A}$ , $V_{bb} = 12\text{ V}$ Status determination $> 40\text{ }\mu\text{s}$ after switching edge	$V_{St (high)}$ $V_{St (low)}$	4.5	-	6.5	V
		-	-	0.4	

**Truth Table**

L = "Low" level H = "High" level	Input voltage	Status	Output voltage
Normal operation	L	H	L
	H	H	H
Open load	L	L	H
	H	H	H
Short-circuit	L	H	L
	H	L	L
Overtemperature	L	L	L
	H	L	L
Undervoltage	L	H	L
	H	L	L

Figure 1: Switching a lamp

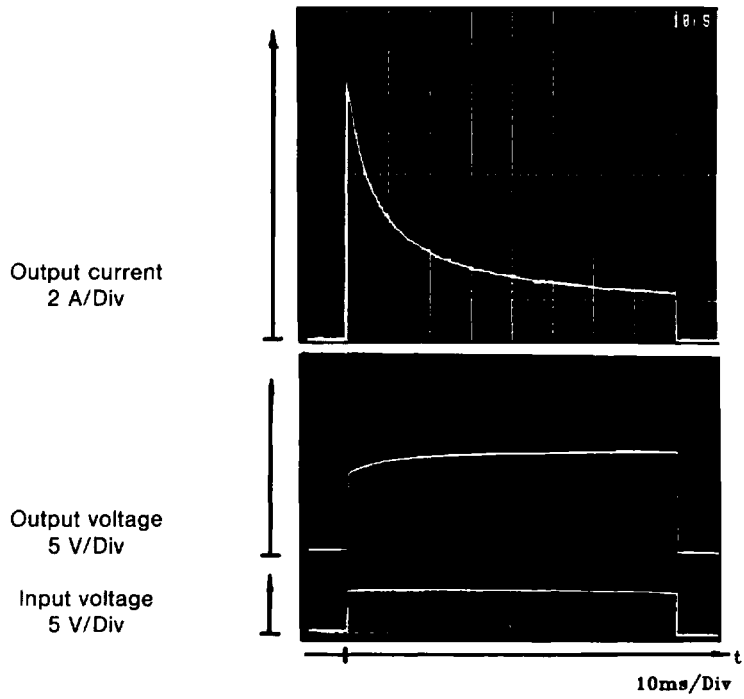
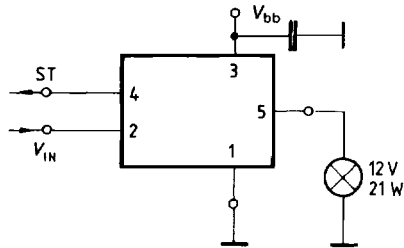


Figure 2: Switching a solenoid





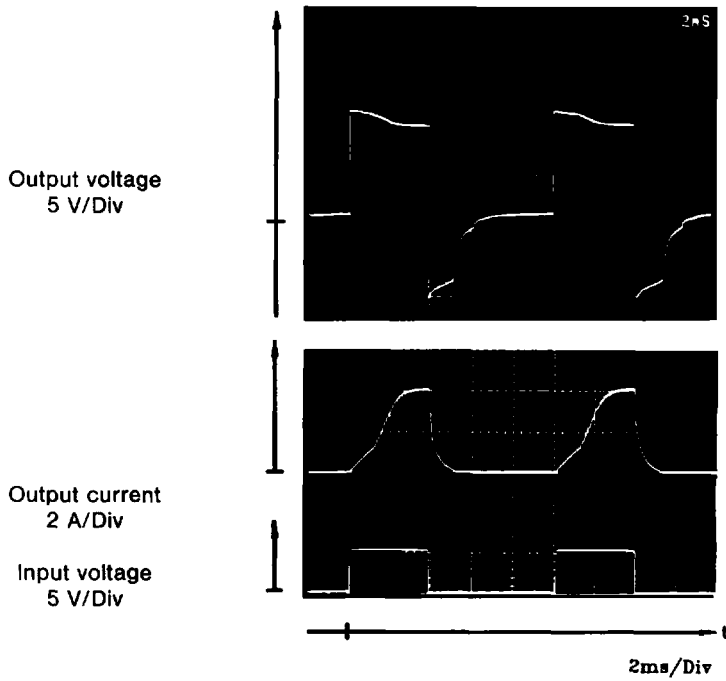


Figure 3: Switching with output short-circuited

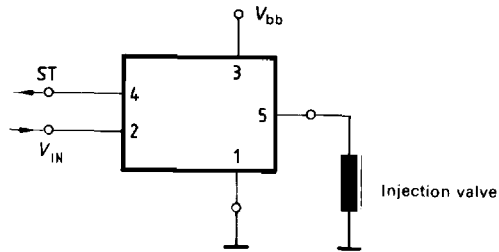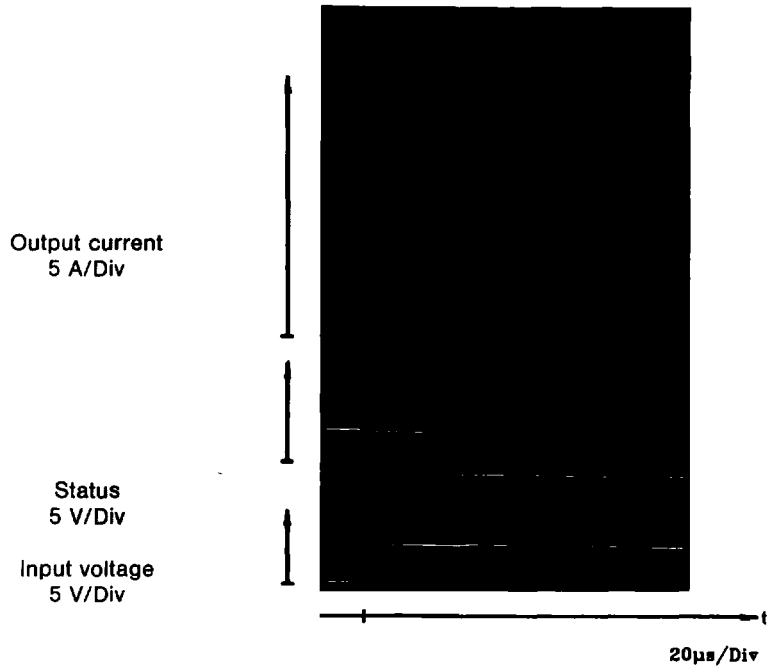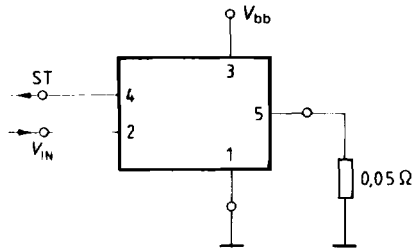


Power dissipation  $P_{tot} = f(T_C)$

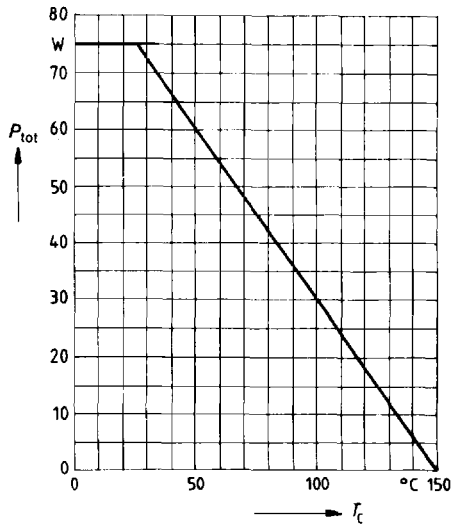


Typ. drain-source on-state resistance

$R_{on} = f(I_L \text{ and } V_{bb})$   
Parameter:  $V_{in} = 5 \text{ V}$

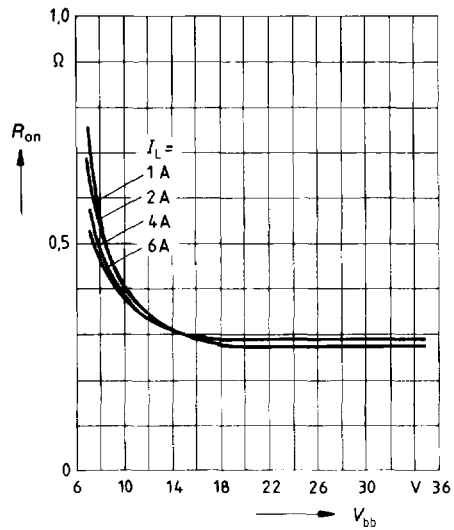


Drain-source on-state resistance

$R_{on} = f(T_J)$   
Parameter:  $V_{bb} = 12 \text{ V}$ ;  $I_L = 2 \text{ A}$ ;  $V_{in} = 5 \text{ V}$

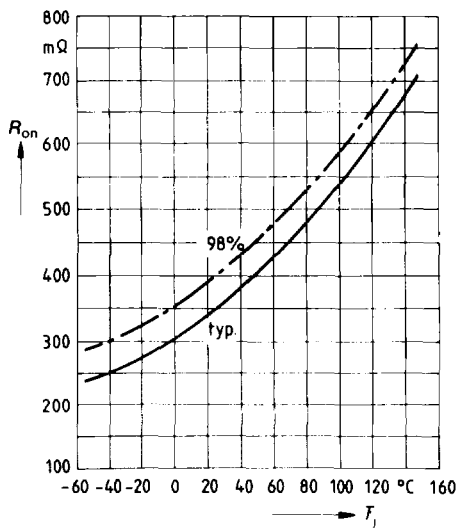

Drain-source on-state resistance


$R_{on} = f(T_J)$   
Parameter:  $V_{bb} = 24 \text{ V}$ ;  $I_L = 2 \text{ A}$ ;  $V_{in} = 5 \text{ V}$

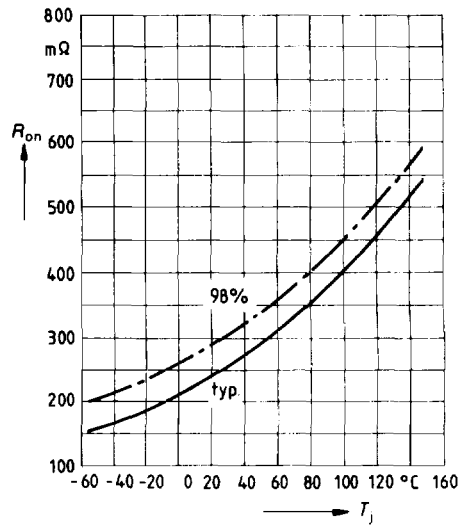

**Typ. drain-source on-state resistance**

$R_{on} = f(V_{bb})$


Parameter:  $I_L = 1.25 \text{ A}$

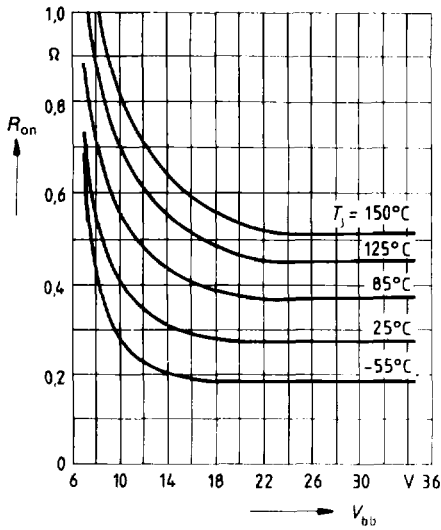

**Typ. drain-source on-state resistance**


$R_{on} = f(V_{bb})$

Parameter:  $I_L = 4 \text{ A}$

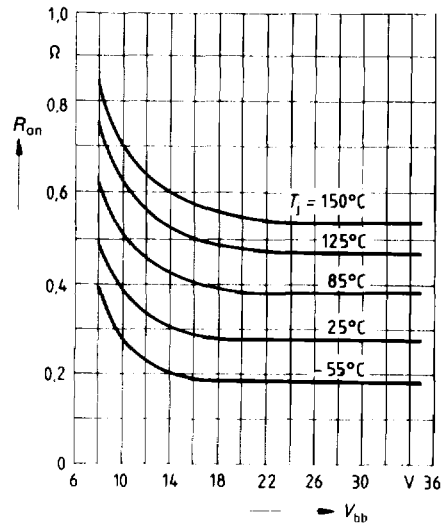


**Typ. short-circuit current  $I_{SC} = f(V_{bb}$  and  $T_j$ )**

Parameter:  $R_L = 0.05 \Omega$ ;  $V_{in} = 5 \text{ V}$

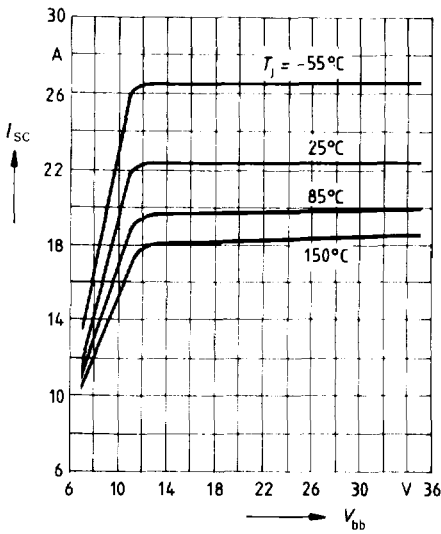


**Typ. stand-by current  $I_R = f(V_{bb})$**

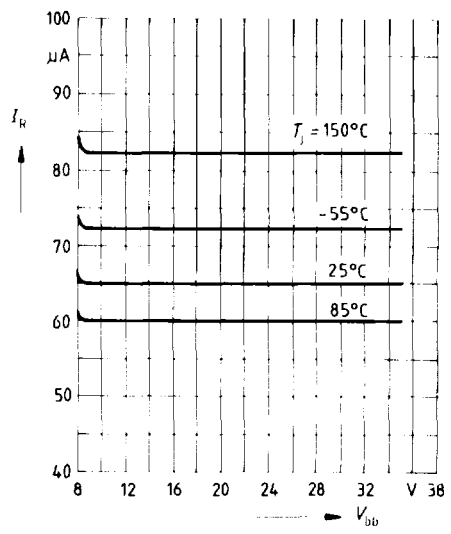





**Load current  $I_L = f(T_c)$**   
 Parameter:  $V_{bb} = 12\text{ V}$ ;  $V_{in} = 5\text{ V}$

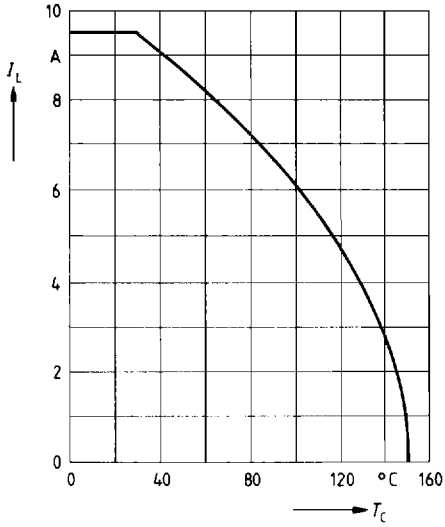


**Load current  $I_L = f(T_c)$**   
 Parameter:  $V_{bb} = 24\text{ V}$ ;  $V_{in} = 5\text{ V}$

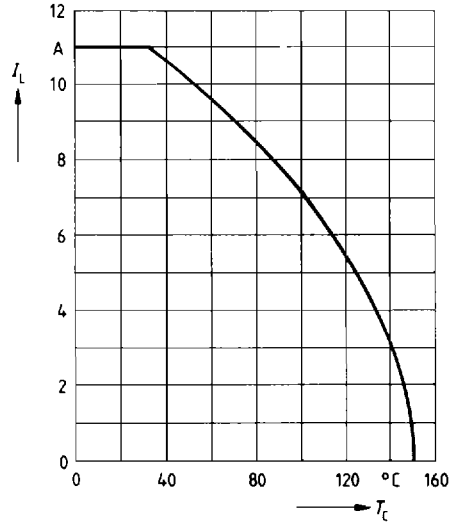


**Typ. input voltage  $V_{in(on)} = f(T_j)$**   
 Parameter:  $R_L = 100\ \Omega$

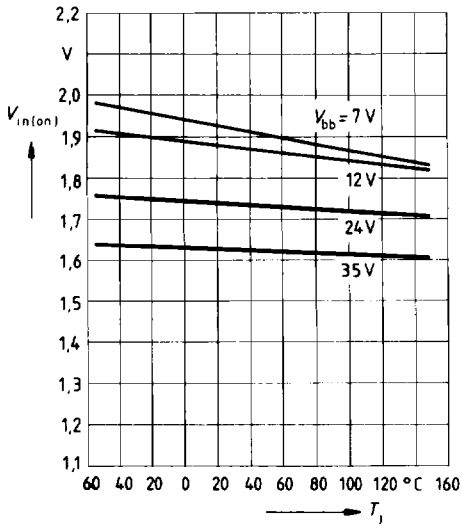


**Typ. input current  $I_{in(on)} = f(T_j)$**   
 Parameter:  $V_{bb} = 12\text{ V}$ ;  $V_{in} = 5\text{ V}$ ;  $R_L = 100\ \Omega$

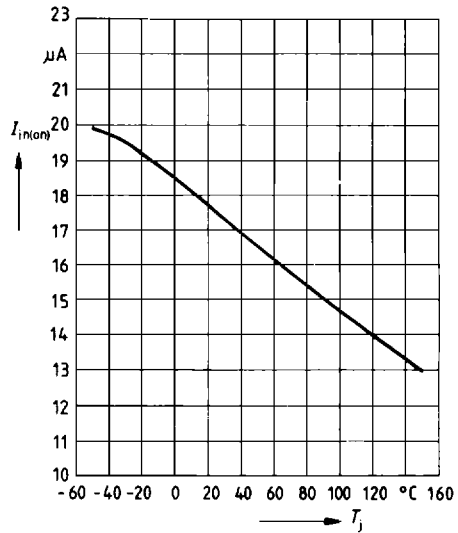


**Typ. status voltage**  $V_{St(high)} = f(V_{bb})$   
 with load current  
 Parameter:  $V_{in} = 3.5 \text{ V}$ ;  $I_{St} = 50 \mu\text{A}$ ;  
 $R_L = 100 \Omega$

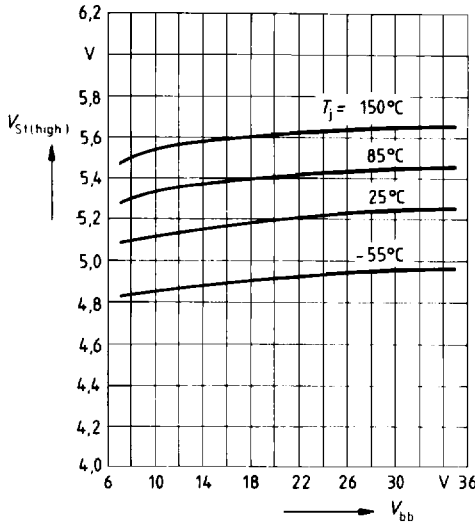

**Typ. status voltage**  $R_{St(high)} = f(V_{bb})$   
 without load current  
 Parameter:  $V_{in} = 0$ ;  $R_L = 100 \Omega$

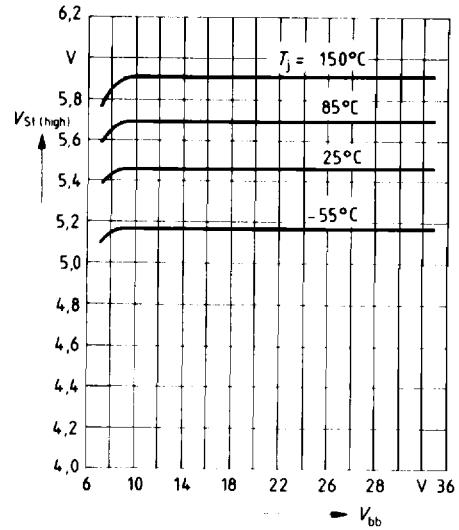

**Typ. open load detection**  $R_{L(min)} = f(T_j)$   
 Parameter:  $V_{bb} = 12 \text{ V}$

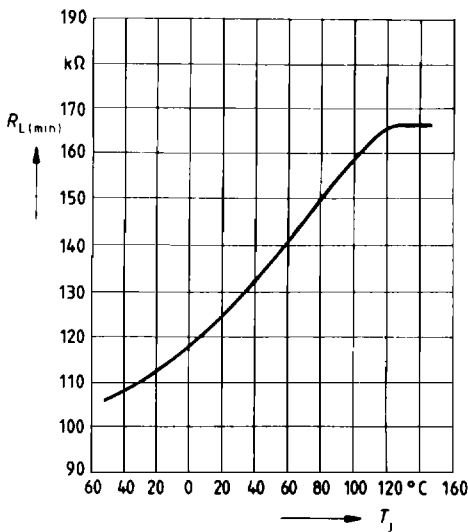

**Forward characteristic of reverse diode**  
 $I_F = f(V_F)$  (pin 5 to 3)  
 Parameter:  $T_j$ ;  $t_p = 80 \mu\text{s}$

