


POSITIVE VOLTAGE REGULATORS


- OUTPUT CURRENT UP TO 1.5 A
- OUTPUT VOLTAGES OF 5; 5.2; 6; 8; 8.5; 9; 12; 15; 18; 24V
- THERMAL OVERLOAD PROTECTION
- SHORT CIRCUIT PROTECTION
- OUTPUT TRANSITION SOA PROTECTION

DESCRIPTION

The L7800 series of three-terminal positive regulators is available in TO-220 ISOWATT220 TO-3 and D²PAK packages and several fixed output voltages, making it useful in a wide range of applications. These regulators can provide local on-card regulation, eliminating the distribution problems associated with single point regulation. Each type employs internal current limiting, thermal shut-down and safe area protection, making it essentially indestructible. If adequate heat sinking is provided, they can deliver over 1A output current. Although designed primarily as fixed voltage regulators, these devices can be used with external components to obtain adjustable voltages and currents.

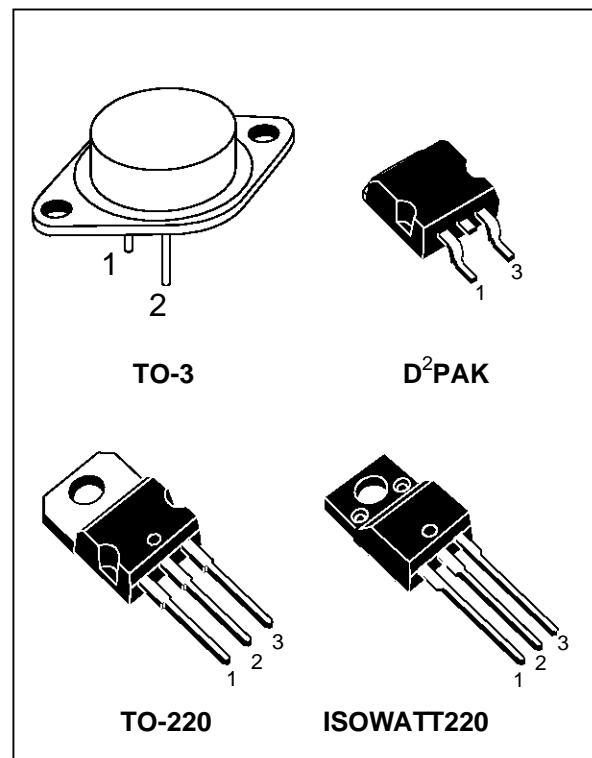

BLOCK DIAGRAM

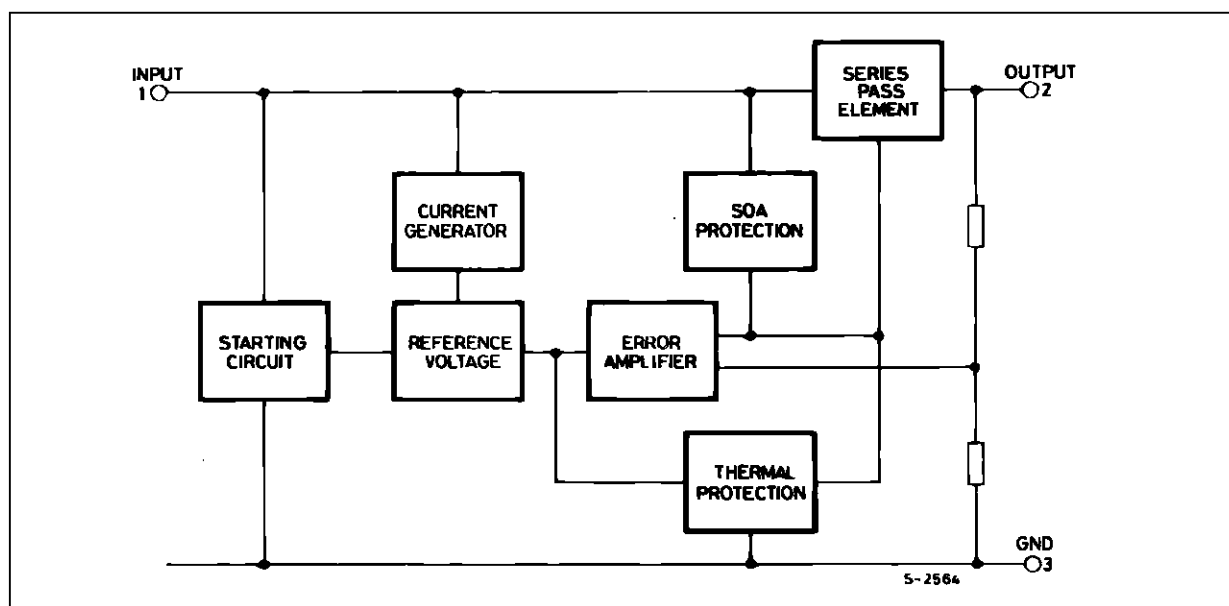

L7800


ABSOLUTE MAXIMUM RATINGS

| Symbol | Parameter | Value | Unit |
|-----------|--|--------------------|------|
| V_i | DC Input Voltage (for $V_O = 5$ to 18V) (for $V_O = 20, 24V$) | 35 | V |
| | | 40 | V |
| I_o | Output Current | Internally limited | |
| P_{tot} | Power Dissipation | Internally limited | |
| T_{op} | Operating Junction Temperature Range (for L7800) (for L7800C) | - 55 to 125 | °C |
| | | 0 to 150 | °C |
| T_{stg} | Storage Temperature Range | - 40 to 150 | °C |

THERMAL DATA

| Symbol | Parameter | | D ² PAK | TO-220 | ISOWATT220 | TO-3 | Unit |
|----------------|-------------------------------------|-----|--------------------|--------|------------|------|------|
| $R_{thj-case}$ | Thermal Resistance Junction-case | Max | 3 | 3 | 4 | 4 | °C/W |
| $R_{thj-amb}$ | Thermal Resistance Junction-ambient | Max | 62.5 | 50 | 60 | 35 | °C/W |


CONNECTION DIAGRAM AND ORDERING NUMBERS (top view)

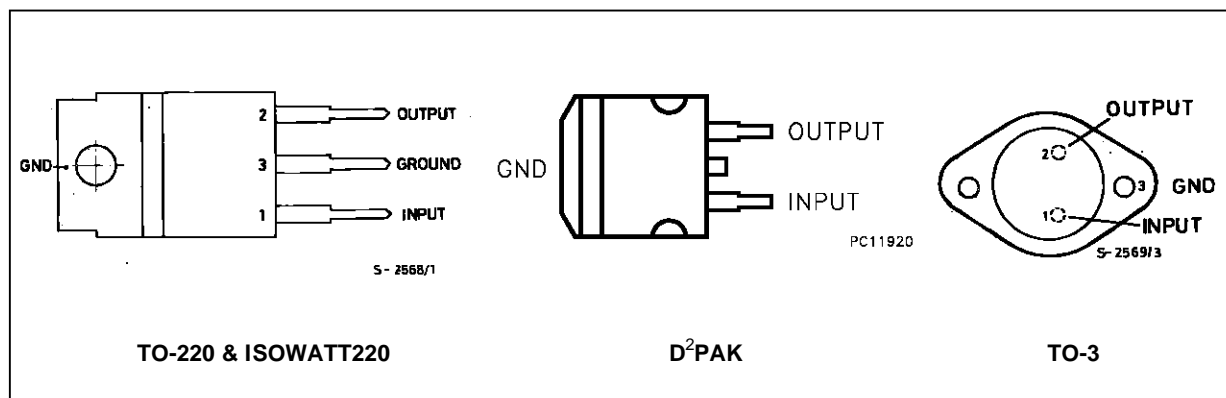


| Type | TO-220 | D ² PAK (*) | ISOWATT 220 | TO-3 | Output Voltage |
|--------|---------|------------------------|-------------|---------|----------------|
| L7805 | | | | L7805T | 5V |
| L7805C | L7805CV | L7805CD2T | L7805CP | L7805CT | 5V |
| L7852C | L7852CV | L7852CD2T | L7852CP | L7852CT | 5.2V |
| L7806 | | | | L7806T | 6V |
| L7806C | L7806CV | L7806CD2T | L7806CP | L7806CT | 6V |
| L7808 | | | | L7808T | 8V |
| L7808C | L7808CV | L7808CD2T | L7808CP | L7808CT | 8V |
| L7885C | L7885CV | L7885CD2T | L7885CP | L7885CT | 8.5V |
| L7809C | L7809CV | L7809CD2T | L7809CP | L7809CT | 9V |
| L7812 | | | | L7812T | 12V |
| L7812C | L7812CV | L7812CD2T | L7812CP | L7812CT | 12V |
| L7815 | | | | L7815T | 15V |
| L7815C | L7815CV | L7815CD2T | L7815CP | L7815CT | 15V |
| L7818 | | | | L7818T | 18V |
| L7818C | L7818CV | L7818CD2T | L7818CP | L7818CT | 18V |
| L7820 | | | | L7820T | 20V |
| L7820C | L7820CV | L7820CD2T | L7820CP | L7820CT | 20V |
| L7824 | | | | L7824T | 24V |
| L7824C | L7824CV | L7824CD2T | L7824CP | L7824CT | 24V |

(*) AVAILABLE IN TAPE AND REEL WITH "-TR" SUFFIX

APPLICATION CIRCUIT

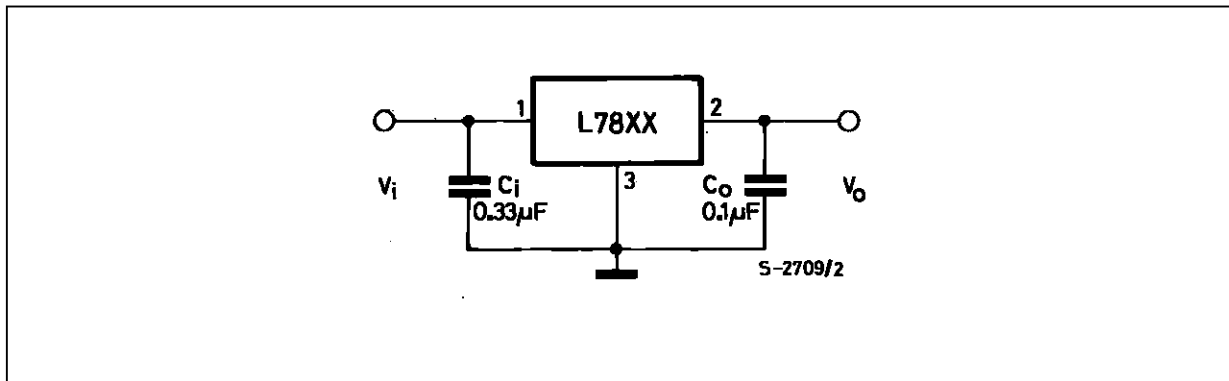

SCHEMATIC DIAGRAM

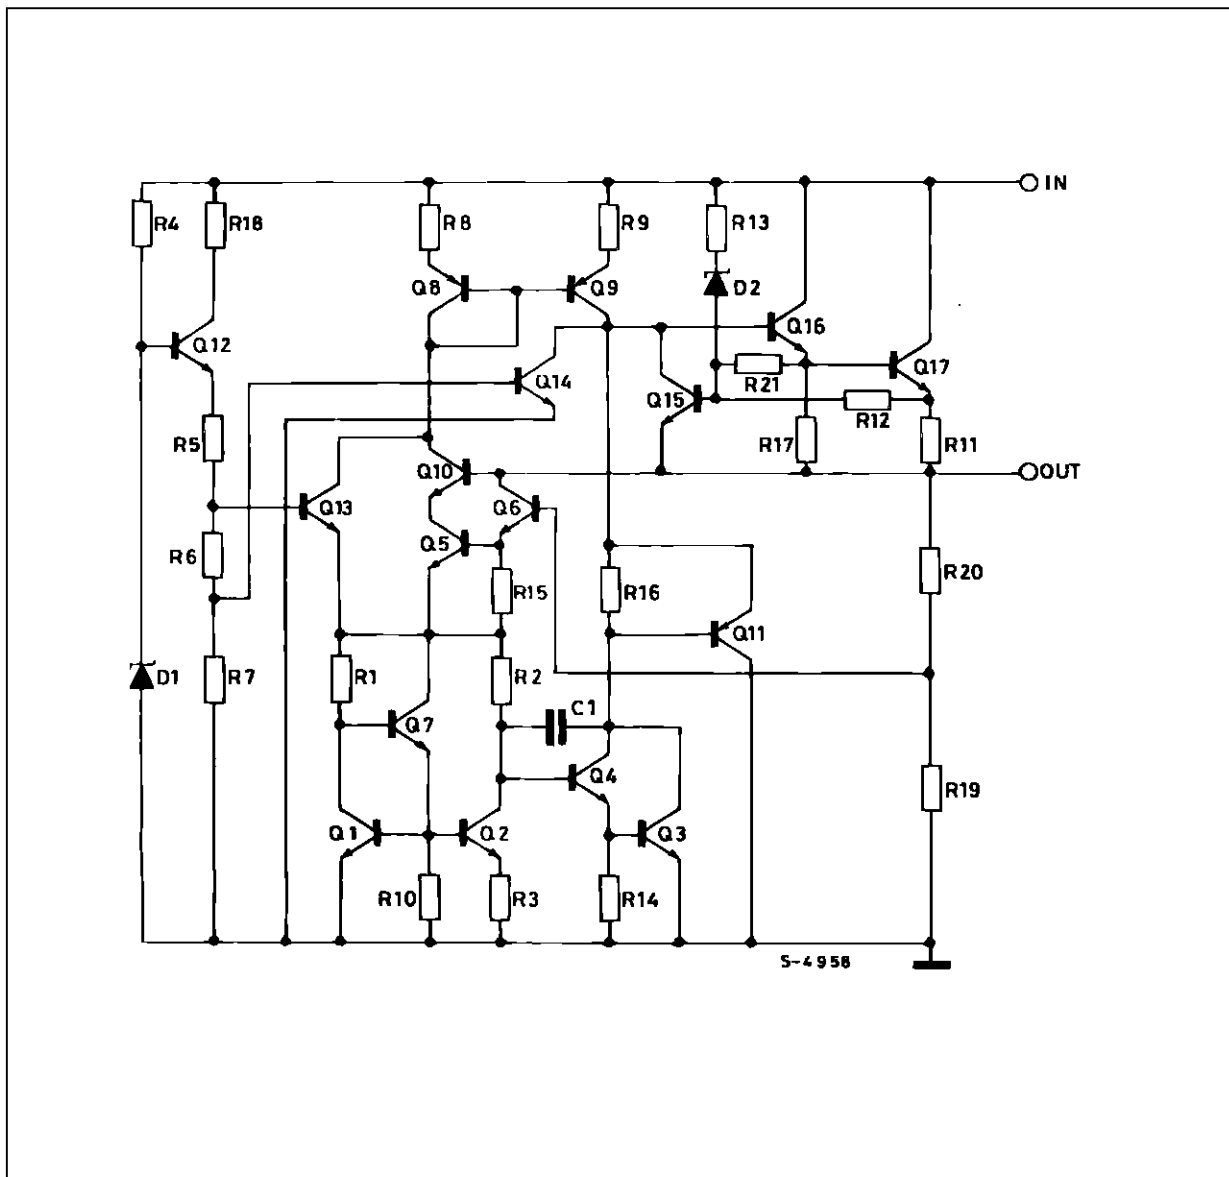

TEST CIRCUITS

Figure 1 : DC Parameter

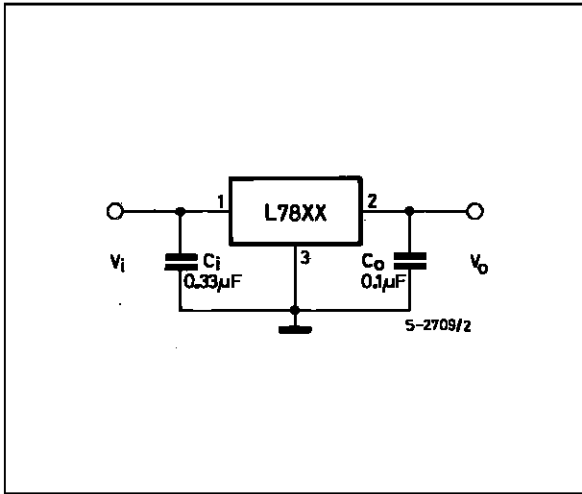


Figure 2 : Load Regulation.


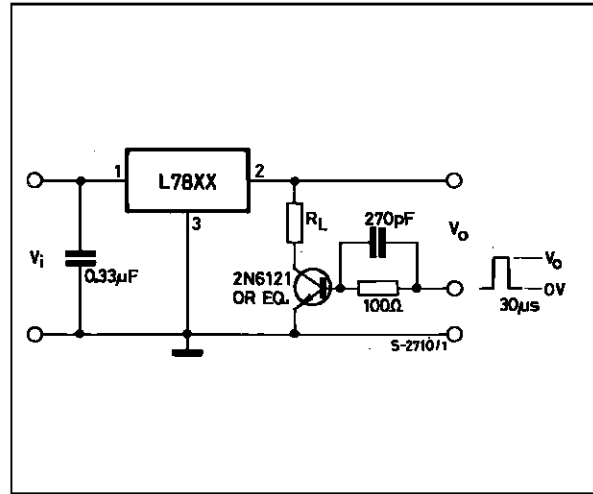


Figure 3 : Ripple Rejection.

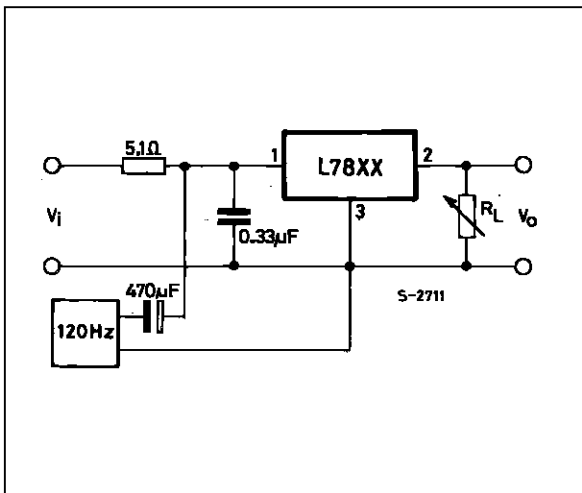

ELECTRICAL CHARACTERISTICS FOR L7805 (refer to the test circuits, $T_j = -55$ to 150 °C, $V_i = 10$ V, $I_o = 500$ mA, $C_i = 0.33$ μ F, $C_o = 0.1$ μ F unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------|----------------------------|---|------|--------|-----------|----------------|
| V_o | Output Voltage | $T_j = 25$ °C | 4.8 | 5 | 5.2 | V |
| V_o | Output Voltage | $I_o = 5$ mA to 1 A $P_o \leq 15$ W $V_i = 8$ to 20 V | 4.65 | 5 | 5.35 | V |
| ΔV_o^* | Line Regulation | $V_i = 7$ to 25 V $T_j = 25$ °C $V_i = 8$ to 12 V $T_j = 25$ °C | | 3 1 | 50 25 | mV mV |
| ΔV_o^* | Load Regulation | $I_o = 5$ to 1500 mA $T_j = 25$ °C $I_o = 250$ to 750 mA $T_j = 25$ °C | | | 100 25 | mV mV |
| I_d | Quiescent Current | $T_j = 25$ °C | | | 6 | mA |
| ΔI_d | Quiescent Current Change | $I_o = 5$ to 1000 mA | | | 0.5 | mA |
| ΔI_d | Quiescent Current Change | $V_i = 8$ to 25 V | | | 0.8 | mA |
| $\frac{\Delta V_o}{\Delta T}$ | Output Voltage Drift | $I_o = 5$ mA | | 0.6 | | mV/°C |
| eN | Output Noise Voltage | B = 10Hz to 100KHz $T_j = 25$ °C | | | 40 | μ V/ V_o |
| SVR | Supply Voltage Rejection | $V_i = 8$ to 18 V $f = 120$ Hz | 68 | | | dB |
| V_d | Dropout Voltage | $I_o = 1$ A $T_j = 25$ °C | | 2 | 2.5 | V |
| R_o | Output Resistance | $f = 1$ KHz | | 17 | | m Ω |
| I_{sc} | Short Circuit Current | $V_i = 35$ V $T_j = 25$ °C | | 0.75 | 1.2 | A |
| I_{scp} | Short Circuit Peak Current | $T_j = 25$ °C | 1.3 | 2.2 | 3.3 | A |

ELECTRICAL CHARACTERISTICS FOR L7806 (refer to the test circuits, $T_j = -55$ to 150 °C, $V_i = 15$ V, $I_o = 500$ mA, $C_i = 0.33$ μ F, $C_o = 0.1$ μ F unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------|----------------------------|---|------|------|-----------|----------------|
| V_o | Output Voltage | $T_j = 25$ °C | 5.75 | 6 | 6.25 | V |
| V_o | Output Voltage | $I_o = 5$ mA to 1 A $P_o \leq 15$ W $V_i = 9$ to 21 V | 5.65 | 6 | 6.35 | V |
| ΔV_o^* | Line Regulation | $V_i = 8$ to 25 V $T_j = 25$ °C $V_i = 9$ to 13 V $T_j = 25$ °C | | | 60 30 | mV mV |
| ΔV_o^* | Load Regulation | $I_o = 5$ to 1500 mA $T_j = 25$ °C $I_o = 250$ to 750 mA $T_j = 25$ °C | | | 100 30 | mV mV |
| I_d | Quiescent Current | $T_j = 25$ °C | | | 6 | mA |
| ΔI_d | Quiescent Current Change | $I_o = 5$ to 1000 mA | | | 0.5 | mA |
| ΔI_d | Quiescent Current Change | $V_i = 9$ to 25 V | | | 0.8 | mA |
| $\frac{\Delta V_o}{\Delta T}$ | Output Voltage Drift | $I_o = 5$ mA | | 0.7 | | mV/°C |
| eN | Output Noise Voltage | B = 10Hz to 100KHz $T_j = 25$ °C | | | 40 | μ V/ V_o |
| SVR | Supply Voltage Rejection | $V_i = 9$ to 19 V $f = 120$ Hz | 65 | | | dB |
| V_d | Dropout Voltage | $I_o = 1$ A $T_j = 25$ °C | | 2 | 2.5 | V |
| R_o | Output Resistance | $f = 1$ KHz | | 19 | | m Ω |
| I_{sc} | Short Circuit Current | $V_i = 35$ V $T_j = 25$ °C | | 0.75 | 1.2 | A |
| I_{scp} | Short Circuit Peak Current | $T_j = 25$ °C | 1.3 | 2.2 | 3.3 | A |

* Load and line regulation are specified at constant junction temperature. Changes in V_o due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

ELECTRICAL CHARACTERISTICS FOR L7808 (refer to the test circuits, $T_j = -55$ to 150 °C, $V_i = 14$ V, $I_o = 500$ mA, $C_i = 0.33$ μ F, $C_o = 0.1$ μ F unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------|----------------------------|---|------|------|-----------|----------------|
| V_o | Output Voltage | $T_j = 25$ °C | 7.7 | 8 | 8.3 | V |
| V_o | Output Voltage | $I_o = 5$ mA to 1 A $P_o \leq 15$ W $V_i = 11.5$ to 23 V | 7.6 | 8 | 8.4 | V |
| ΔV_o^* | Line Regulation | $V_i = 10.5$ to 25 V $T_j = 25$ °C $V_i = 11$ to 17 V $T_j = 25$ °C | | | 80 40 | mV mV |
| ΔV_o^* | Load Regulation | $I_o = 5$ to 1500 mA $T_j = 25$ °C $I_o = 250$ to 750 mA $T_j = 25$ °C | | | 100 40 | mV mV |
| I_d | Quiescent Current | $T_j = 25$ °C | | | 6 | mA |
| ΔI_d | Quiescent Current Change | $I_o = 5$ to 1000 mA | | | 0.5 | mA |
| ΔI_d | Quiescent Current Change | $V_i = 11.5$ to 25 V | | | 0.8 | mA |
| $\frac{\Delta V_o}{\Delta T}$ | Output Voltage Drift | $I_o = 5$ mA | | 1 | | mV/°C |
| eN | Output Noise Voltage | B = 10Hz to 100KHz $T_j = 25$ °C | | | 40 | μ V/ V_o |
| SVR | Supply Voltage Rejection | $V_i = 11.5$ to 21.5 V $f = 120$ Hz | 62 | | | dB |
| V_d | Dropout Voltage | $I_o = 1$ A $T_j = 25$ °C | | 2 | 2.5 | V |
| R_o | Output Resistance | $f = 1$ KHz | | 16 | | m Ω |
| I_{sc} | Short Circuit Current | $V_i = 35$ V $T_j = 25$ °C | | 0.75 | 1.2 | A |
| I_{scp} | Short Circuit Peak Current | $T_j = 25$ °C | 1.3 | 2.2 | 3.3 | A |

ELECTRICAL CHARACTERISTICS FOR L7812 (refer to the test circuits, $T_j = -55$ to 150 °C, $V_i = 19$ V, $I_o = 500$ mA, $C_i = 0.33$ μ F, $C_o = 0.1$ μ F unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------|----------------------------|---|------|------|-----------|----------------|
| V_o | Output Voltage | $T_j = 25$ °C | 11.5 | 12 | 12.5 | V |
| V_o | Output Voltage | $I_o = 5$ mA to 1 A $P_o \leq 15$ W $V_i = 15.5$ to 27 V | 11.4 | 12 | 12.6 | V |
| ΔV_o^* | Line Regulation | $V_i = 14.5$ to 30 V $T_j = 25$ °C $V_i = 16$ to 22 V $T_j = 25$ °C | | | 120 60 | mV mV |
| ΔV_o^* | Load Regulation | $I_o = 5$ to 1500 mA $T_j = 25$ °C $I_o = 250$ to 750 mA $T_j = 25$ °C | | | 100 60 | mV mV |
| I_d | Quiescent Current | $T_j = 25$ °C | | | 6 | mA |
| ΔI_d | Quiescent Current Change | $I_o = 5$ to 1000 mA | | | 0.5 | mA |
| ΔI_d | Quiescent Current Change | $V_i = 15$ to 30 V | | | 0.8 | mA |
| $\frac{\Delta V_o}{\Delta T}$ | Output Voltage Drift | $I_o = 5$ mA | | 1.5 | | mV/°C |
| eN | Output Noise Voltage | B = 10Hz to 100KHz $T_j = 25$ °C | | | 40 | μ V/ V_o |
| SVR | Supply Voltage Rejection | $V_i = 15$ to 25 V $f = 120$ Hz | 61 | | | dB |
| V_d | Dropout Voltage | $I_o = 1$ A $T_j = 25$ °C | | 2 | 2.5 | V |
| R_o | Output Resistance | $f = 1$ KHz | | 18 | | m Ω |
| I_{sc} | Short Circuit Current | $V_i = 35$ V $T_j = 25$ °C | | 0.75 | 1.2 | A |
| I_{scp} | Short Circuit Peak Current | $T_j = 25$ °C | 1.3 | 2.2 | 3.3 | A |

* Load and line regulation are specified at constant junction temperature. Changes in V_o due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

ELECTRICAL CHARACTERISTICS FOR L7815 (refer to the test circuits, $T_j = -55$ to 150 °C, $V_i = 23$ V, $I_o = 500$ mA, $C_i = 0.33$ μ F, $C_o = 0.1$ μ F unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------|----------------------------|---|-------|------|-----------|----------------|
| V_o | Output Voltage | $T_j = 25$ °C | 14.4 | 15 | 15.6 | V |
| V_o | Output Voltage | $I_o = 5$ mA to 1 A $P_o \leq 15$ W $V_i = 18.5$ to 30 V | 14.25 | 15 | 15.75 | V |
| ΔV_o^* | Line Regulation | $V_i = 17.5$ to 30 V $T_j = 25$ °C $V_i = 20$ to 26 V $T_j = 25$ °C | | | 150 75 | mV mV |
| ΔV_o^* | Load Regulation | $I_o = 5$ to 1500 mA $T_j = 25$ °C $I_o = 250$ to 750 mA $T_j = 25$ °C | | | 150 75 | mV mV |
| I_d | Quiescent Current | $T_j = 25$ °C | | | 6 | mA |
| ΔI_d | Quiescent Current Change | $I_o = 5$ to 1000 mA | | | 0.5 | mA |
| ΔI_d | Quiescent Current Change | $V_i = 18.5$ to 30 V | | | 0.8 | mA |
| $\frac{\Delta V_o}{\Delta T}$ | Output Voltage Drift | $I_o = 5$ mA | | 1.8 | | mV/°C |
| eN | Output Noise Voltage | B = 10Hz to 100KHz $T_j = 25$ °C | | | 40 | μ V/ V_o |
| SVR | Supply Voltage Rejection | $V_i = 18.5$ to 28.5 V $f = 120$ Hz | 60 | | | dB |
| V_d | Dropout Voltage | $I_o = 1$ A $T_j = 25$ °C | | 2 | 2.5 | V |
| R_o | Output Resistance | $f = 1$ KHz | | 19 | | m Ω |
| I_{sc} | Short Circuit Current | $V_i = 35$ V $T_j = 25$ °C | | 0.75 | 1.2 | A |
| I_{scp} | Short Circuit Peak Current | $T_j = 25$ °C | 1.3 | 2.2 | 3.3 | A |

ELECTRICAL CHARACTERISTICS FOR L7818 (refer to the test circuits, $T_j = -55$ to 150 °C, $V_i = 26$ V, $I_o = 500$ mA, $C_i = 0.33$ μ F, $C_o = 0.1$ μ F unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------|----------------------------|---|------|------|-----------|----------------|
| V_o | Output Voltage | $T_j = 25$ °C | 17.3 | 18 | 18.7 | V |
| V_o | Output Voltage | $I_o = 5$ mA to 1 A $P_o \leq 15$ W $V_i = 22$ to 33 V | 17.1 | 18 | 18.9 | V |
| ΔV_o^* | Line Regulation | $V_i = 21$ to 33 V $T_j = 25$ °C $V_i = 24$ to 30 V $T_j = 25$ °C | | | 180 90 | mV mV |
| ΔV_o^* | Load Regulation | $I_o = 5$ to 1500 mA $T_j = 25$ °C $I_o = 250$ to 750 mA $T_j = 25$ °C | | | 180 90 | mV mV |
| I_d | Quiescent Current | $T_j = 25$ °C | | | 6 | mA |
| ΔI_d | Quiescent Current Change | $I_o = 5$ to 1000 mA | | | 0.5 | mA |
| ΔI_d | Quiescent Current Change | $V_i = 22$ to 33 V | | | 0.8 | mA |
| $\frac{\Delta V_o}{\Delta T}$ | Output Voltage Drift | $I_o = 5$ mA | | 2.3 | | mV/°C |
| eN | Output Noise Voltage | B = 10Hz to 100KHz $T_j = 25$ °C | | | 40 | μ V/ V_o |
| SVR | Supply Voltage Rejection | $V_i = 22$ to 32 V $f = 120$ Hz | 59 | | | dB |
| V_d | Dropout Voltage | $I_o = 1$ A $T_j = 25$ °C | | 2 | 2.5 | V |
| R_o | Output Resistance | $f = 1$ KHz | | 22 | | m Ω |
| I_{sc} | Short Circuit Current | $V_i = 35$ V $T_j = 25$ °C | | 0.75 | 1.2 | A |
| I_{scp} | Short Circuit Peak Current | $T_j = 25$ °C | 1.3 | 2.2 | 3.3 | A |

* Load and line regulation are specified at constant junction temperature. Changes in V_o due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

ELECTRICAL CHARACTERISTICS FOR L7820 (refer to the test circuits, $T_j = -55$ to 150 °C, $V_i = 28$ V, $I_o = 500$ mA, $C_i = 0.33$ μ F, $C_o = 0.1$ μ F unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------|----------------------------|---|------|------|------------|----------------|
| V_o | Output Voltage | $T_j = 25$ °C | 19.2 | 20 | 20.8 | V |
| V_o | Output Voltage | $I_o = 5$ mA to 1 A $P_o \leq 15$ W $V_i = 24$ to 35 V | 19 | 20 | 21 | V |
| ΔV_o^* | Line Regulation | $V_i = 22.5$ to 35 V $T_j = 25$ °C $V_i = 26$ to 32 V $T_j = 25$ °C | | | 200 100 | mV mV |
| ΔV_o^* | Load Regulation | $I_o = 5$ to 1500 mA $T_j = 25$ °C $I_o = 250$ to 750 mA $T_j = 25$ °C | | | 200 100 | mV mV |
| I_d | Quiescent Current | $T_j = 25$ °C | | | 6 | mA |
| ΔI_d | Quiescent Current Change | $I_o = 5$ to 1000 mA | | | 0.5 | mA |
| ΔI_d | Quiescent Current Change | $V_i = 24$ to 35 V | | | 0.8 | mA |
| $\frac{\Delta V_o}{\Delta T}$ | Output Voltage Drift | $I_o = 5$ mA | | 2.5 | | mV/°C |
| eN | Output Noise Voltage | B = 10Hz to 100KHz $T_j = 25$ °C | | | 40 | μ V/ V_o |
| SVR | Supply Voltage Rejection | $V_i = 24$ to 35 V $f = 120$ Hz | 58 | | | dB |
| V_d | Dropout Voltage | $I_o = 1$ A $T_j = 25$ °C | | 2 | 2.5 | V |
| R_o | Output Resistance | $f = 1$ KHz | | 24 | | m Ω |
| I_{sc} | Short Circuit Current | $V_i = 35$ V $T_j = 25$ °C | | 0.75 | 1.2 | A |
| I_{scp} | Short Circuit Peak Current | $T_j = 25$ °C | 1.3 | 2.2 | 3.3 | A |

ELECTRICAL CHARACTERISTICS FOR L7824 (refer to the test circuits, $T_j = -55$ to 150 °C, $V_i = 33$ V, $I_o = 500$ mA, $C_i = 0.33$ μ F, $C_o = 0.1$ μ F unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------|----------------------------|---|------|------|------------|----------------|
| V_o | Output Voltage | $T_j = 25$ °C | 23 | 24 | 25 | V |
| V_o | Output Voltage | $I_o = 5$ mA to 1 A $P_o \leq 15$ W $V_i = 28$ to 38 V | 22.8 | 24 | 25.2 | V |
| ΔV_o^* | Line Regulation | $V_i = 27$ to 38 V $T_j = 25$ °C $V_i = 30$ to 36 V $T_j = 25$ °C | | | 240 120 | mV mV |
| ΔV_o^* | Load Regulation | $I_o = 5$ to 1500 mA $T_j = 25$ °C $I_o = 250$ to 750 mA $T_j = 25$ °C | | | 240 120 | mV mV |
| I_d | Quiescent Current | $T_j = 25$ °C | | | 6 | mA |
| ΔI_d | Quiescent Current Change | $I_o = 5$ to 1000 mA | | | 0.5 | mA |
| ΔI_d | Quiescent Current Change | $V_i = 28$ to 38 V | | | 0.8 | mA |
| $\frac{\Delta V_o}{\Delta T}$ | Output Voltage Drift | $I_o = 5$ mA | | 3 | | mV/°C |
| eN | Output Noise Voltage | B = 10Hz to 100KHz $T_j = 25$ °C | | | 40 | μ V/ V_o |
| SVR | Supply Voltage Rejection | $V_i = 28$ to 38 V $f = 120$ Hz | 56 | | | dB |
| V_d | Dropout Voltage | $I_o = 1$ A $T_j = 25$ °C | | 2 | 2.5 | V |
| R_o | Output Resistance | $f = 1$ KHz | | 28 | | m Ω |
| I_{sc} | Short Circuit Current | $V_i = 35$ V $T_j = 25$ °C | | 0.75 | 1.2 | A |
| I_{scp} | Short Circuit Peak Current | $T_j = 25$ °C | 1.3 | 2.2 | 3.3 | A |

* Load and line regulation are specified at constant junction temperature. Changes in V_o due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

ELECTRICAL CHARACTERISTICS FOR L7805C (refer to the test circuits, $T_j = 0$ to 125 °C, $V_i = 10$ V, $I_o = 500$ mA, $C_i = 0.33$ μ F, $C_o = 0.1$ μ F unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------|----------------------------|---|------|--------|-----------|------------|
| V_o | Output Voltage | $T_j = 25$ °C | 4.8 | 5 | 5.2 | V |
| V_o | Output Voltage | $I_o = 5$ mA to 1 A $P_o \leq 15$ W $V_i = 7$ to 20 V | 4.75 | 5 | 5.25 | V |
| ΔV_o^* | Line Regulation | $V_i = 7$ to 25 V $T_j = 25$ °C $V_i = 8$ to 12 V $T_j = 25$ °C | | 3 1 | 100 50 | mV mV |
| ΔV_o^* | Load Regulation | $I_o = 5$ to 1500 mA $T_j = 25$ °C $I_o = 250$ to 750 mA $T_j = 25$ °C | | | 100 50 | mV mV |
| I_d | Quiescent Current | $T_j = 25$ °C | | | 8 | mA |
| ΔI_d | Quiescent Current Change | $I_o = 5$ to 1000 mA | | | 0.5 | mA |
| ΔI_d | Quiescent Current Change | $V_i = 7$ to 25 V | | | 0.8 | mA |
| $\frac{\Delta V_o}{\Delta T}$ | Output Voltage Drift | $I_o = 5$ mA | | -1.1 | | mV/°C |
| eN | Output Noise Voltage | B = 10Hz to 100KHz $T_j = 25$ °C | | 40 | | μ V |
| SVR | Supply Voltage Rejection | $V_i = 8$ to 18 V $f = 120$ Hz | 62 | | | dB |
| V_d | Dropout Voltage | $I_o = 1$ A $T_j = 25$ °C | | 2 | | V |
| R_o | Output Resistance | $f = 1$ KHz | | 17 | | m Ω |
| I_{sc} | Short Circuit Current | $V_i = 35$ V $T_j = 25$ °C | | 750 | | mA |
| I_{scp} | Short Circuit Peak Current | $T_j = 25$ °C | | 2.2 | | A |

ELECTRICAL CHARACTERISTICS FOR L7852C (refer to the test circuits, $T_j = 0$ to 125 °C, $V_i = 10$ V, $I_o = 500$ mA, $C_i = 0.33$ μ F, $C_o = 0.1$ μ F unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------|----------------------------|---|------|--------|-----------|------------|
| V_o | Output Voltage | $T_j = 25$ °C | 5.0 | 5.2 | 5.4 | V |
| V_o | Output Voltage | $I_o = 5$ mA to 1 A $P_o \leq 15$ W $V_i = 8$ to 20 V | 4.95 | 5.2 | 5.45 | V |
| ΔV_o^* | Line Regulation | $V_i = 7$ to 25 V $T_j = 25$ °C $V_i = 8$ to 12 V $T_j = 25$ °C | | 3 1 | 105 52 | mV mV |
| ΔV_o^* | Load Regulation | $I_o = 5$ to 1500 mA $T_j = 25$ °C $I_o = 250$ to 750 mA $T_j = 25$ °C | | | 105 52 | mV mV |
| I_d | Quiescent Current | $T_j = 25$ °C | | | 8 | mA |
| ΔI_d | Quiescent Current Change | $I_o = 5$ to 1000 mA | | | 0.5 | mA |
| ΔI_d | Quiescent Current Change | $V_i = 7$ to 25 V | | | 1.3 | mA |
| $\frac{\Delta V_o}{\Delta T}$ | Output Voltage Drift | $I_o = 5$ mA | | -1.0 | | mV/°C |
| eN | Output Noise Voltage | B = 10Hz to 100KHz $T_j = 25$ °C | | 42 | | μ V |
| SVR | Supply Voltage Rejection | $V_i = 8$ to 18 V $f = 120$ Hz | 61 | | | dB |
| V_d | Dropout Voltage | $I_o = 1$ A $T_j = 25$ °C | | 2 | | V |
| R_o | Output Resistance | $f = 1$ KHz | | 17 | | m Ω |
| I_{sc} | Short Circuit Current | $V_i = 35$ V $T_j = 25$ °C | | 750 | | mA |
| I_{scp} | Short Circuit Peak Current | $T_j = 25$ °C | | 2.2 | | A |

* Load and line regulation are specified at constant junction temperature. Changes in V_o due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

ELECTRICAL CHARACTERISTICS FOR L7806C (refer to the test circuits, $T_j = 0$ to 125 °C, $V_i = 11$ V, $I_o = 500$ mA, $C_i = 0.33$ μ F, $C_o = 0.1$ μ F unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------|----------------------------|---|------|------|-----------|------------|
| V_o | Output Voltage | $T_j = 25$ °C | 5.75 | 6 | 6.25 | V |
| V_o | Output Voltage | $I_o = 5$ mA to 1 A $P_o \leq 15$ W $V_i = 8$ to 21 V | 5.7 | 6 | 6.3 | V |
| ΔV_o^* | Line Regulation | $V_i = 8$ to 25 V $T_j = 25$ °C $V_i = 9$ to 13 V $T_j = 25$ °C | | | 120 60 | mV mV |
| ΔV_o^* | Load Regulation | $I_o = 5$ to 1500 mA $T_j = 25$ °C $I_o = 250$ to 750 mA $T_j = 25$ °C | | | 120 60 | mV mV |
| I_d | Quiescent Current | $T_j = 25$ °C | | | 8 | mA |
| ΔI_d | Quiescent Current Change | $I_o = 5$ to 1000 mA | | | 0.5 | mA |
| ΔI_d | Quiescent Current Change | $V_i = 8$ to 25 V | | | 1.3 | mA |
| $\frac{\Delta V_o}{\Delta T}$ | Output Voltage Drift | $I_o = 5$ mA | | -0.8 | | mV/°C |
| eN | Output Noise Voltage | $B = 10$ Hz to 100 KHz $T_j = 25$ °C | | 45 | | μ V |
| SVR | Supply Voltage Rejection | $V_i = 9$ to 19 V $f = 120$ Hz | 59 | | | dB |
| V_d | Dropout Voltage | $I_o = 1$ A $T_j = 25$ °C | | 2 | | V |
| R_o | Output Resistance | $f = 1$ KHz | | 19 | | m Ω |
| I_{sc} | Short Circuit Current | $V_i = 35$ V $T_j = 25$ °C | | 550 | | mA |
| I_{scp} | Short Circuit Peak Current | $T_j = 25$ °C | | 2.2 | | A |

ELECTRICAL CHARACTERISTICS FOR L7808C (refer to the test circuits, $T_j = 0$ to 125 °C, $V_i = 14$ V, $I_o = 500$ mA, $C_i = 0.33$ μ F, $C_o = 0.1$ μ F unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------|----------------------------|---|------|------|-----------|------------|
| V_o | Output Voltage | $T_j = 25$ °C | 7.7 | 8 | 8.3 | V |
| V_o | Output Voltage | $I_o = 5$ mA to 1 A $P_o \leq 15$ W $V_i = 10.5$ to 25 V | 7.6 | 8 | 8.4 | V |
| ΔV_o^* | Line Regulation | $V_i = 10.5$ to 25 V $T_j = 25$ °C $V_i = 11$ to 17 V $T_j = 25$ °C | | | 160 80 | mV mV |
| ΔV_o^* | Load Regulation | $I_o = 5$ to 1500 mA $T_j = 25$ °C $I_o = 250$ to 750 mA $T_j = 25$ °C | | | 160 80 | mV mV |
| I_d | Quiescent Current | $T_j = 25$ °C | | | 8 | mA |
| ΔI_d | Quiescent Current Change | $I_o = 5$ to 1000 mA | | | 0.5 | mA |
| ΔI_d | Quiescent Current Change | $V_i = 10.5$ to 25 V | | | 1 | mA |
| $\frac{\Delta V_o}{\Delta T}$ | Output Voltage Drift | $I_o = 5$ mA | | -0.8 | | mV/°C |
| eN | Output Noise Voltage | $B = 10$ Hz to 100 KHz $T_j = 25$ °C | | 52 | | μ V |
| SVR | Supply Voltage Rejection | $V_i = 11.5$ to 21.5 V $f = 120$ Hz | 56 | | | dB |
| V_d | Dropout Voltage | $I_o = 1$ A $T_j = 25$ °C | | 2 | | V |
| R_o | Output Resistance | $f = 1$ KHz | | 16 | | m Ω |
| I_{sc} | Short Circuit Current | $V_i = 35$ V $T_j = 25$ °C | | 450 | | mA |
| I_{scp} | Short Circuit Peak Current | $T_j = 25$ °C | | 2.2 | | A |

* Load and line regulation are specified at constant junction temperature. Changes in V_o due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

ELECTRICAL CHARACTERISTICS FOR L7885C (refer to the test circuits, $T_j = 0$ to 125 °C, $V_i = 14.5$ V, $I_o = 500$ mA, $C_i = 0.33$ μ F, $C_o = 0.1$ μ F unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------|----------------------------|---|------|------|-----------|------------|
| V_o | Output Voltage | $T_j = 25$ °C | 8.2 | 8.5 | 8.8 | V |
| V_o | Output Voltage | $I_o = 5$ mA to 1 A $P_o \leq 15$ W $V_i = 11$ to 26 V | 8.1 | 8.5 | 8.9 | V |
| ΔV_o^* | Line Regulation | $V_i = 11$ to 27 V $T_j = 25$ °C $V_i = 11.5$ to 17.5 V $T_j = 25$ °C | | | 160 80 | mV mV |
| ΔV_o^* | Load Regulation | $I_o = 5$ to 1500 mA $T_j = 25$ °C $I_o = 250$ to 750 mA $T_j = 25$ °C | | | 160 80 | mV mV |
| I_d | Quiescent Current | $T_j = 25$ °C | | | 8 | mA |
| ΔI_d | Quiescent Current Change | $I_o = 5$ to 1000 mA | | | 0.5 | mA |
| ΔI_d | Quiescent Current Change | $V_i = 11$ to 27 V | | | 1 | mA |
| $\frac{\Delta V_o}{\Delta T}$ | Output Voltage Drift | $I_o = 5$ mA | | -0.8 | | mV/°C |
| eN | Output Noise Voltage | $B = 10$ Hz to 100 KHz $T_j = 25$ °C | | 55 | | μ V |
| SVR | Supply Voltage Rejection | $V_i = 12$ to 22 V $f = 120$ Hz | 56 | | | dB |
| V_d | Dropout Voltage | $I_o = 1$ A $T_j = 25$ °C | | 2 | | V |
| R_o | Output Resistance | $f = 1$ KHz | | 16 | | m Ω |
| I_{sc} | Short Circuit Current | $V_i = 35$ V $T_j = 25$ °C | | 450 | | mA |
| I_{scp} | Short Circuit Peak Current | $T_j = 25$ °C | | 2.2 | | A |

ELECTRICAL CHARACTERISTICS FOR L7809C (refer to the test circuits, $T_j = 0$ to 125 °C, $V_i = 15$ V, $I_o = 500$ mA, $C_i = 0.33$ μ F, $C_o = 0.1$ μ F unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------|----------------------------|---|------|------|-----------|------------|
| V_o | Output Voltage | $T_j = 25$ °C | 8.65 | 9 | 9.35 | V |
| V_o | Output Voltage | $I_o = 5$ mA to 1 A $P_o \leq 15$ W $V_i = 11.5$ to 26 V | 8.55 | 9 | 9.45 | V |
| ΔV_o^* | Line Regulation | $V_i = 11.5$ to 26 V $T_j = 25$ °C $V_i = 12$ to 18 V $T_j = 25$ °C | | | 180 90 | mV mV |
| ΔV_o^* | Load Regulation | $I_o = 5$ to 1500 mA $T_j = 25$ °C $I_o = 250$ to 750 mA $T_j = 25$ °C | | | 180 90 | mV mV |
| I_d | Quiescent Current | $T_j = 25$ °C | | | 8 | mA |
| ΔI_d | Quiescent Current Change | $I_o = 5$ to 1000 mA | | | 0.5 | mA |
| ΔI_d | Quiescent Current Change | $V_i = 11.5$ to 26 V | | | 1 | mA |
| $\frac{\Delta V_o}{\Delta T}$ | Output Voltage Drift | $I_o = 5$ mA | | -1.0 | | mV/°C |
| eN | Output Noise Voltage | $B = 10$ Hz to 100 KHz $T_j = 25$ °C | | 70 | | μ V |
| SVR | Supply Voltage Rejection | $V_i = 12$ to 23 V $f = 120$ Hz | 55 | | | dB |
| V_d | Dropout Voltage | $I_o = 1$ A $T_j = 25$ °C | | 2 | | V |
| R_o | Output Resistance | $f = 1$ KHz | | 17 | | m Ω |
| I_{sc} | Short Circuit Current | $V_i = 35$ V $T_j = 25$ °C | | 400 | | mA |
| I_{scp} | Short Circuit Peak Current | $T_j = 25$ °C | | 2.2 | | A |

* Load and line regulation are specified at constant junction temperature. Changes in V_o due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

ELECTRICAL CHARACTERISTICS FOR L7812C (refer to the test circuits, $T_j = 0$ to 125 °C, $V_i = 19$ V, $I_o = 500$ mA, $C_i = 0.33$ μ F, $C_o = 0.1$ μ F unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------|----------------------------|---|------|------|------------|------------|
| V_o | Output Voltage | $T_j = 25$ °C | 11.5 | 12 | 12.5 | V |
| V_o | Output Voltage | $I_o = 5$ mA to 1 A $P_o \leq 15$ W $V_i = 14.5$ to 27 V | 11.4 | 12 | 12.6 | V |
| ΔV_o^* | Line Regulation | $V_i = 14.5$ to 30 V $T_j = 25$ °C $V_i = 16$ to 22 V $T_j = 25$ °C | | | 240 120 | mV mV |
| ΔV_o^* | Load Regulation | $I_o = 5$ to 1500 mA $T_j = 25$ °C $I_o = 250$ to 750 mA $T_j = 25$ °C | | | 240 120 | mV mV |
| I_d | Quiescent Current | $T_j = 25$ °C | | | 8 | mA |
| ΔI_d | Quiescent Current Change | $I_o = 5$ to 1000 mA | | | 0.5 | mA |
| ΔI_d | Quiescent Current Change | $V_i = 14.5$ to 30 V | | | 1 | mA |
| $\frac{\Delta V_o}{\Delta T}$ | Output Voltage Drift | $I_o = 5$ mA | | -1 | | mV/°C |
| eN | Output Noise Voltage | $B = 10$ Hz to 100 KHz $T_j = 25$ °C | | 75 | | μ V |
| SVR | Supply Voltage Rejection | $V_i = 15$ to 25 V $f = 120$ Hz | 55 | | | dB |
| V_d | Dropout Voltage | $I_o = 1$ A $T_j = 25$ °C | | 2 | | V |
| R_o | Output Resistance | $f = 1$ KHz | | 18 | | m Ω |
| I_{sc} | Short Circuit Current | $V_i = 35$ V $T_j = 25$ °C | | 350 | | mA |
| I_{scp} | Short Circuit Peak Current | $T_j = 25$ °C | | 2.2 | | A |

ELECTRICAL CHARACTERISTICS FOR L7815C (refer to the test circuits, $T_j = 0$ to 125 °C, $V_i = 23$ V, $I_o = 500$ mA, $C_i = 0.33$ μ F, $C_o = 0.1$ μ F unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------|----------------------------|---|-------|------|------------|------------|
| V_o | Output Voltage | $T_j = 25$ °C | 14.4 | 15 | 15.6 | V |
| V_o | Output Voltage | $I_o = 5$ mA to 1 A $P_o \leq 15$ W $V_i = 17.5$ to 30 V | 14.25 | 15 | 15.75 | V |
| ΔV_o^* | Line Regulation | $V_i = 17.5$ to 30 V $T_j = 25$ °C $V_i = 20$ to 26 V $T_j = 25$ °C | | | 300 150 | mV mV |
| ΔV_o^* | Load Regulation | $I_o = 5$ to 1500 mA $T_j = 25$ °C $I_o = 250$ to 750 mA $T_j = 25$ °C | | | 300 150 | mV mV |
| I_d | Quiescent Current | $T_j = 25$ °C | | | 8 | mA |
| ΔI_d | Quiescent Current Change | $I_o = 5$ to 1000 mA | | | 0.5 | mA |
| ΔI_d | Quiescent Current Change | $V_i = 17.5$ to 30 V | | | 1 | mA |
| $\frac{\Delta V_o}{\Delta T}$ | Output Voltage Drift | $I_o = 5$ mA | | -1 | | mV/°C |
| eN | Output Noise Voltage | $B = 10$ Hz to 100 KHz $T_j = 25$ °C | | 90 | | μ V |
| SVR | Supply Voltage Rejection | $V_i = 18.5$ to 28.5 V $f = 120$ Hz | 54 | | | dB |
| V_d | Dropout Voltage | $I_o = 1$ A $T_j = 25$ °C | | 2 | | V |
| R_o | Output Resistance | $f = 1$ KHz | | 19 | | m Ω |
| I_{sc} | Short Circuit Current | $V_i = 35$ V $T_j = 25$ °C | | 230 | | mA |
| I_{scp} | Short Circuit Peak Current | $T_j = 25$ °C | | 2.1 | | A |

* Load and line regulation are specified at constant junction temperature. Changes in V_o due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

ELECTRICAL CHARACTERISTICS FOR L7818C (refer to the test circuits, $T_j = 0$ to 125 °C, $V_i = 26$ V, $I_o = 500$ mA, $C_i = 0.33$ μ F, $C_o = 0.1$ μ F unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------|----------------------------|---|------|------|------------|------------|
| V_o | Output Voltage | $T_j = 25$ °C | 17.3 | 18 | 18.7 | V |
| V_o | Output Voltage | $I_o = 5$ mA to 1 A $P_o \leq 15$ W $V_i = 21$ to 33 V | 17.1 | 18 | 18.9 | V |
| ΔV_o^* | Line Regulation | $V_i = 21$ to 33 V $T_j = 25$ °C $V_i = 24$ to 30 V $T_j = 25$ °C | | | 360 180 | mV mV |
| ΔV_o^* | Load Regulation | $I_o = 5$ to 1500 mA $T_j = 25$ °C $I_o = 250$ to 750 mA $T_j = 25$ °C | | | 360 180 | mV mV |
| I_d | Quiescent Current | $T_j = 25$ °C | | | 8 | mA |
| ΔI_d | Quiescent Current Change | $I_o = 5$ to 1000 mA | | | 0.5 | mA |
| ΔI_d | Quiescent Current Change | $V_i = 21$ to 33 V | | | 1 | mA |
| $\frac{\Delta V_o}{\Delta T}$ | Output Voltage Drift | $I_o = 5$ mA | | -1 | | mV/°C |
| eN | Output Noise Voltage | $B = 10$ Hz to 100 KHz $T_j = 25$ °C | | 110 | | μ V |
| SVR | Supply Voltage Rejection | $V_i = 22$ to 32 V $f = 120$ Hz | 53 | | | dB |
| V_d | Dropout Voltage | $I_o = 1$ A $T_j = 25$ °C | | 2 | | V |
| R_o | Output Resistance | $f = 1$ KHz | | 22 | | m Ω |
| I_{sc} | Short Circuit Current | $V_i = 35$ V $T_j = 25$ °C | | 200 | | mA |
| I_{scp} | Short Circuit Peak Current | $T_j = 25$ °C | | 2.1 | | A |

ELECTRICAL CHARACTERISTICS FOR L7820C (refer to the test circuits, $T_j = 0$ to 125 °C, $V_i = 28$ V, $I_o = 500$ mA, $C_i = 0.33$ μ F, $C_o = 0.1$ μ F unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------|----------------------------|---|------|------|------------|------------|
| V_o | Output Voltage | $T_j = 25$ °C | 19.2 | 20 | 20.8 | V |
| V_o | Output Voltage | $I_o = 5$ mA to 1 A $P_o \leq 15$ W $V_i = 23$ to 35 V | 19 | 20 | 21 | V |
| ΔV_o^* | Line Regulation | $V_i = 22.5$ to 35 V $T_j = 25$ °C $V_i = 26$ to 32 V $T_j = 25$ °C | | | 400 200 | mV mV |
| ΔV_o^* | Load Regulation | $I_o = 5$ to 1500 mA $T_j = 25$ °C $I_o = 250$ to 750 mA $T_j = 25$ °C | | | 400 200 | mV mV |
| I_d | Quiescent Current | $T_j = 25$ °C | | | 8 | mA |
| ΔI_d | Quiescent Current Change | $I_o = 5$ to 1000 mA | | | 0.5 | mA |
| ΔI_d | Quiescent Current Change | $V_i = 23$ to 35 V | | | 1 | mA |
| $\frac{\Delta V_o}{\Delta T}$ | Output Voltage Drift | $I_o = 5$ mA | | -1 | | mV/°C |
| eN | Output Noise Voltage | $B = 10$ Hz to 100 KHz $T_j = 25$ °C | | 150 | | μ V |
| SVR | Supply Voltage Rejection | $V_i = 24$ to 35 V $f = 120$ Hz | 52 | | | dB |
| V_d | Dropout Voltage | $I_o = 1$ A $T_j = 25$ °C | | 2 | | V |
| R_o | Output Resistance | $f = 1$ KHz | | 24 | | m Ω |
| I_{sc} | Short Circuit Current | $V_i = 35$ V $T_j = 25$ °C | | 180 | | mA |
| I_{scp} | Short Circuit Peak Current | $T_j = 25$ °C | | 2.1 | | A |

* Load and line regulation are specified at constant junction temperature. Changes in V_o due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

ELECTRICAL CHARACTERISTICS FOR L7824C (refer to the test circuits, $T_j = 0$ to 125 °C, $V_i = 33$ V, $I_o = 500$ mA, $C_i = 0.33$ μ F, $C_o = 0.1$ μ F unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------|----------------------------|---|------|------|------------|------------|
| V_o | Output Voltage | $T_j = 25$ °C | 23 | 24 | 25 | V |
| V_o | Output Voltage | $I_o = 5$ mA to 1 A $P_o \leq 15$ W $V_i = 27$ to 38 V | 22.8 | 24 | 25.2 | V |
| ΔV_o^* | Line Regulation | $V_i = 27$ to 38 V $T_j = 25$ °C $V_i = 30$ to 36 V $T_j = 25$ °C | | | 480 240 | mV mV |
| ΔV_o^* | Load Regulation | $I_o = 5$ to 1500 mA $T_j = 25$ °C $I_o = 250$ to 750 mA $T_j = 25$ °C | | | 480 240 | mV mV |
| I_d | Quiescent Current | $T_j = 25$ °C | | | 8 | mA |
| ΔI_d | Quiescent Current Change | $I_o = 5$ to 1000 mA | | | 0.5 | mA |
| ΔI_d | Quiescent Current Change | $V_i = 27$ to 38 V | | | 1 | mA |
| $\frac{\Delta V_o}{\Delta T}$ | Output Voltage Drift | $I_o = 5$ mA | | -1.5 | | mV/°C |
| eN | Output Noise Voltage | $B = 10$ Hz to 100 KHz $T_j = 25$ °C | | 170 | | μ V |
| SVR | Supply Voltage Rejection | $V_i = 28$ to 38 V $f = 120$ Hz | 50 | | | dB |
| V_d | Dropout Voltage | $I_o = 1$ A $T_j = 25$ °C | | 2 | | V |
| R_o | Output Resistance | $f = 1$ KHz | | 28 | | m Ω |
| I_{sc} | Short Circuit Current | $V_i = 35$ V $T_j = 25$ °C | | 150 | | mA |
| I_{scp} | Short Circuit Peak Current | $T_j = 25$ °C | | 2.1 | | A |

* Load and line regulation are specified at constant junction temperature. Changes in V_o due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

Figure 4 : Dropout Voltage vs. Junction Temperature.

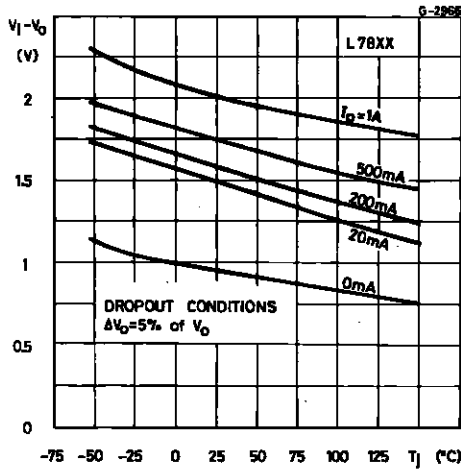


Figure 5 : Peak Output Current vs. Input/output Differential Voltage.

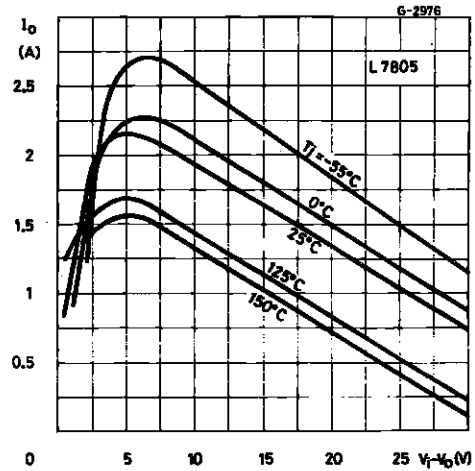


Figure 6 : Supply Voltage Rejection vs. Frequency.

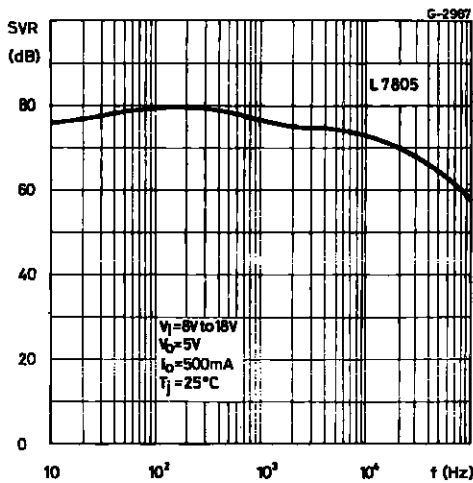


Figure 7 : Output Voltage vs. Junction Temperature.

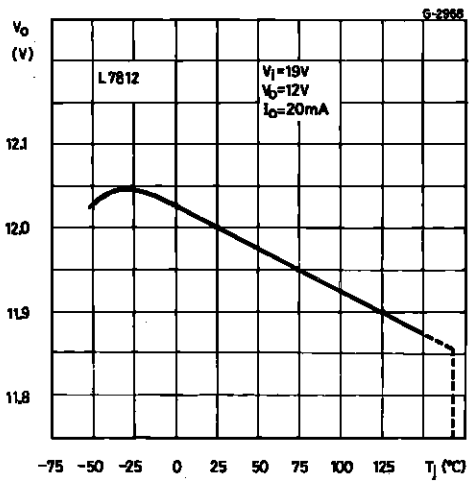


Figure 8 : Output Impedance vs. Frequency.

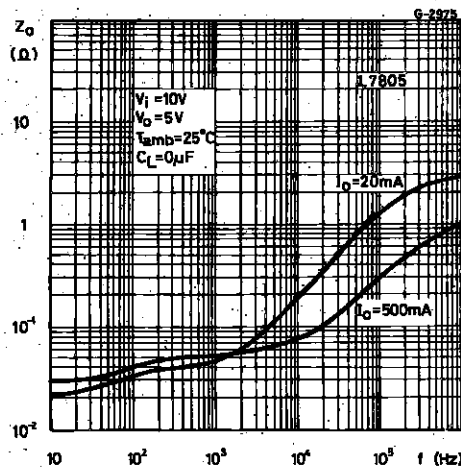


Figure 9 : Quiescent Current vs. Junction Temperature.

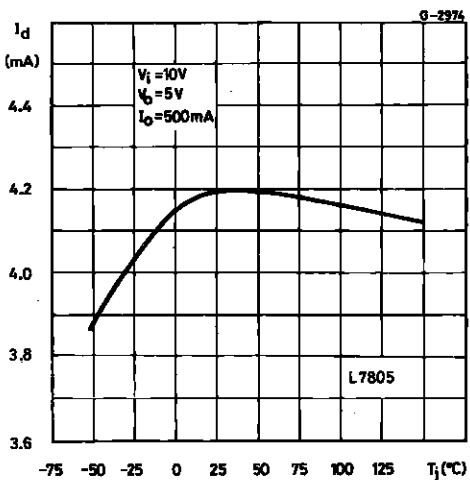


Figure 10 : Load Transient Response.

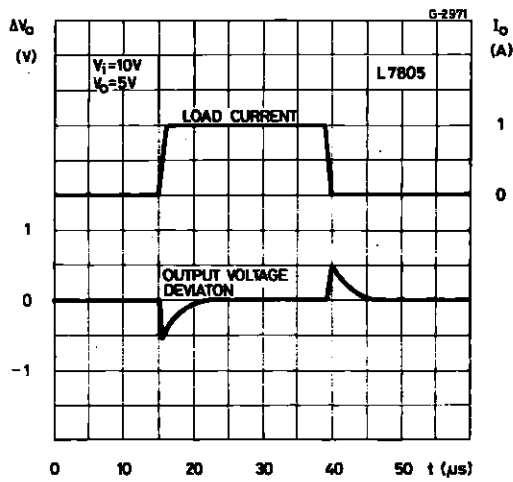


Figure 11 : Line Transient Response.

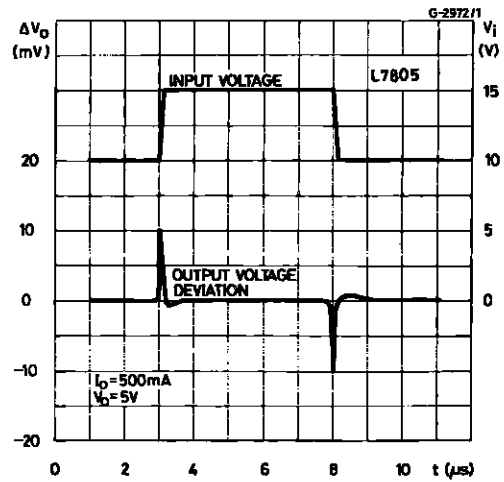


Figure 12 : Quiescent Current vs. Input Voltage.

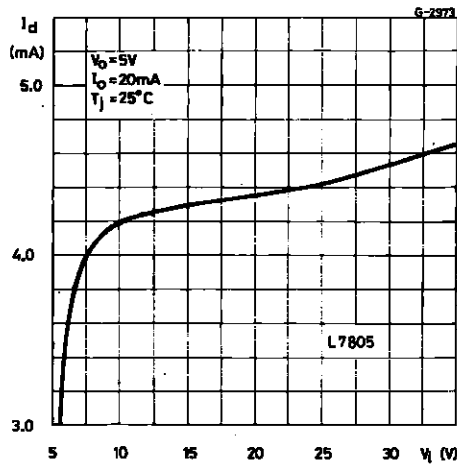


Figure 13 : Fixed Output Regulator.


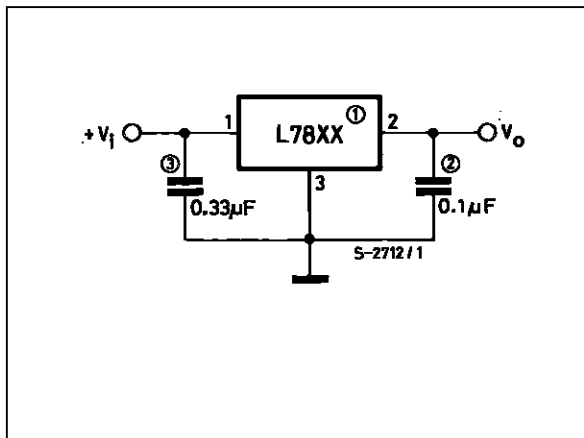


Figure 14 : Current Regulator.

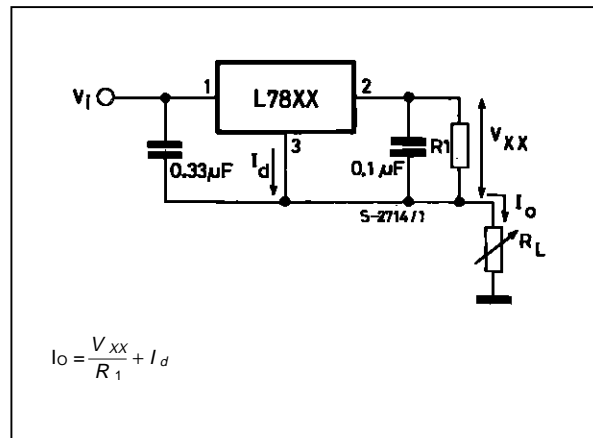

NOTE:

1. To specify an output voltage, substitute voltage value for "XX".
2. Although no output capacitor is need for stability, it does improve transient response.
3. Required if regulator is locate an appreciable distance from power supply filter.

Figure 15 : Circuit for Increasing Output Voltage.

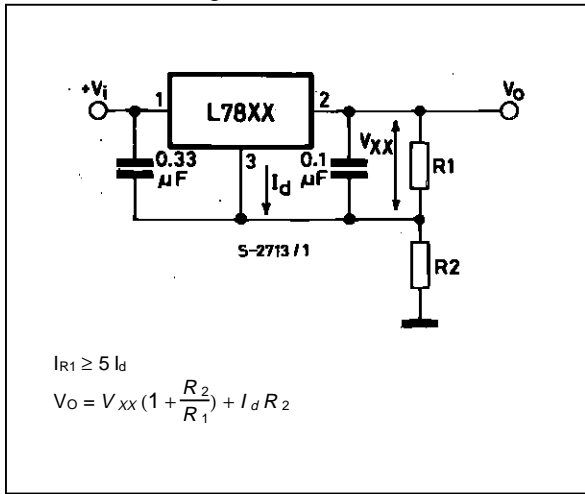


Figure 16 : Adjustable Output Regulator (7 to 30V).

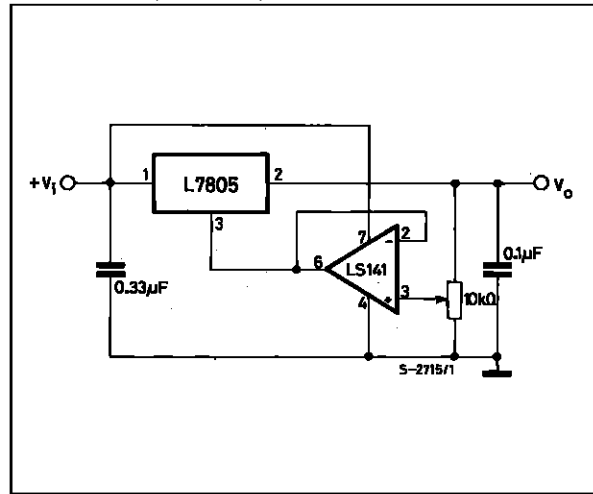


Figure 17 : 0.5 to 10V Regulator.

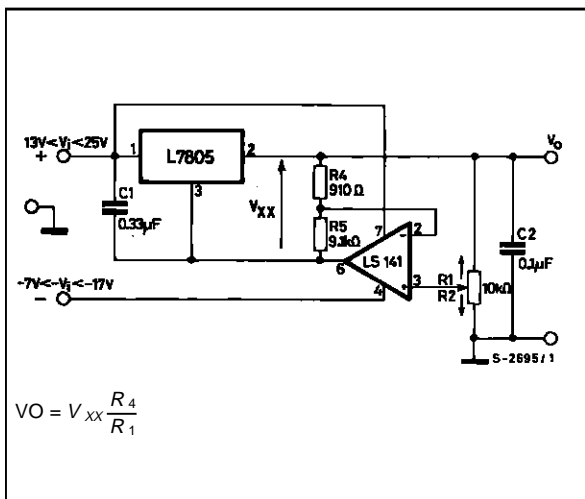


Figure 18 : High Current Voltage Regulator.

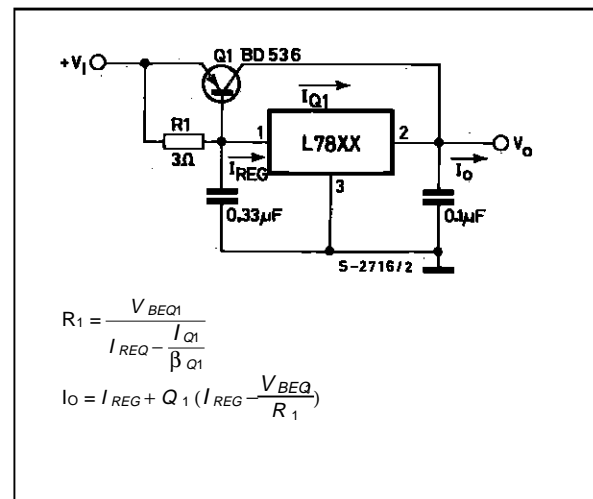


Figure 19 : High Output Current with Short Circuit Protection.

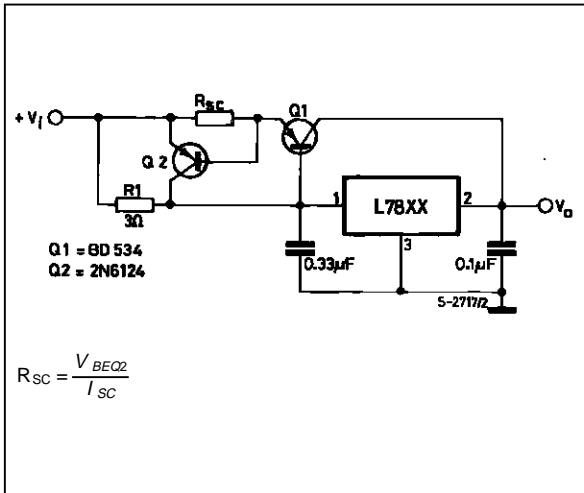


Figure 20 : Tracking Voltage Regulator.


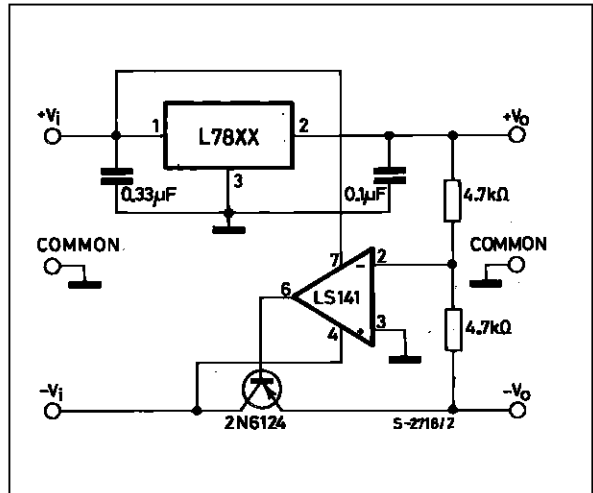


Figure 21 : Split Power Supply (± 15V – 1A).

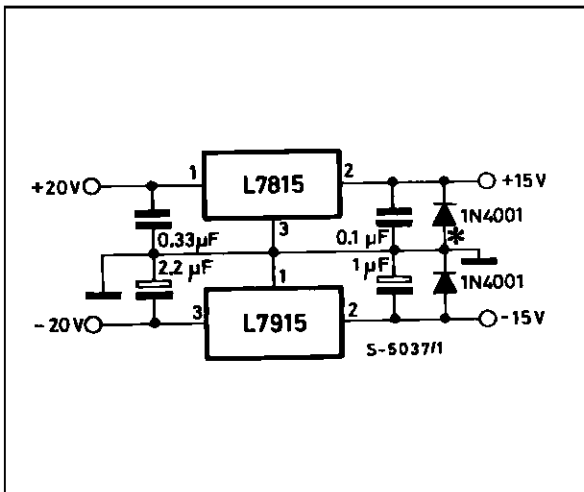

* Against potential latch-up problems.

Figure 22 : Negative Output Voltage Circuit.

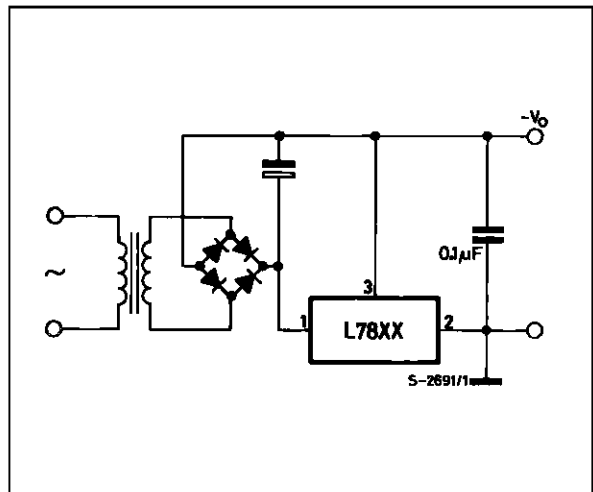


Figure 23 : Switching Regulator.

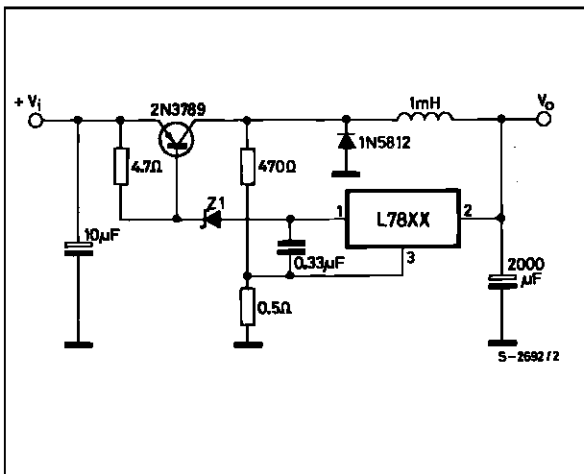


Figure 24 : High Input Voltage Circuit.

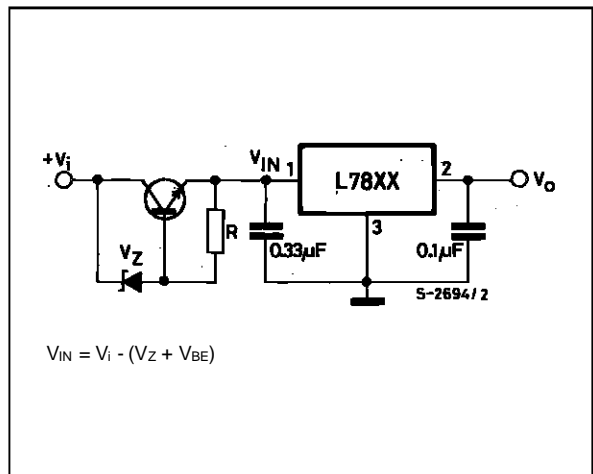


Figure 25 : High Input Voltage Circuit.

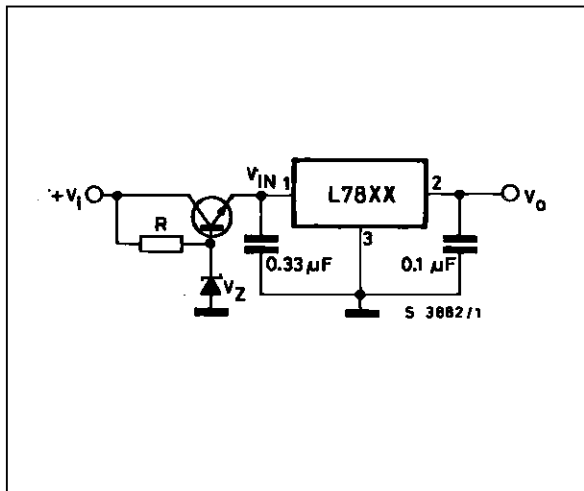


Figure 26 : High Output Voltage Regulator.

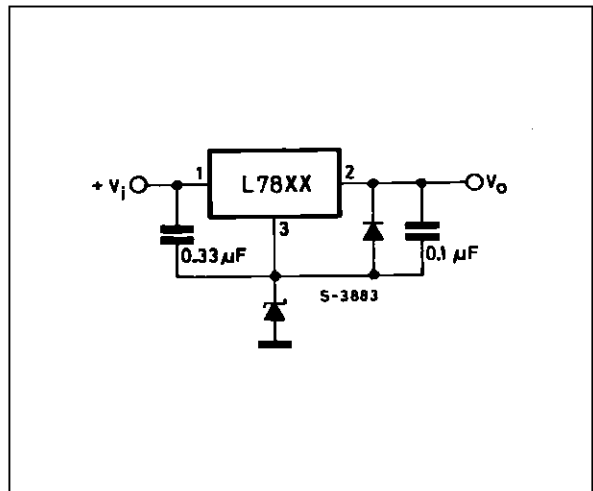


Figure 27 : High Input and Output Voltage.

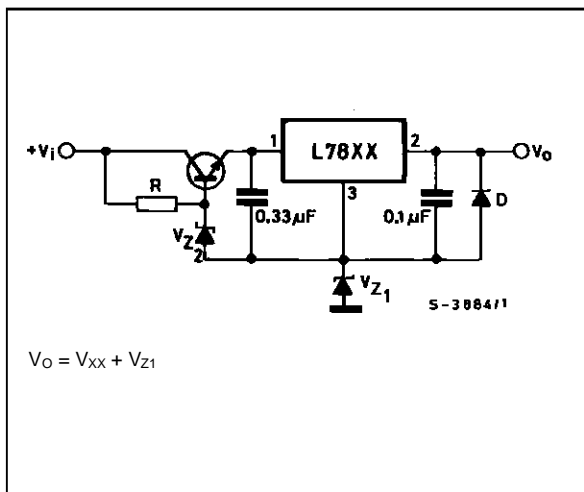


Figure 28 : Reducing Power Dissipation with Dropping Resistor.

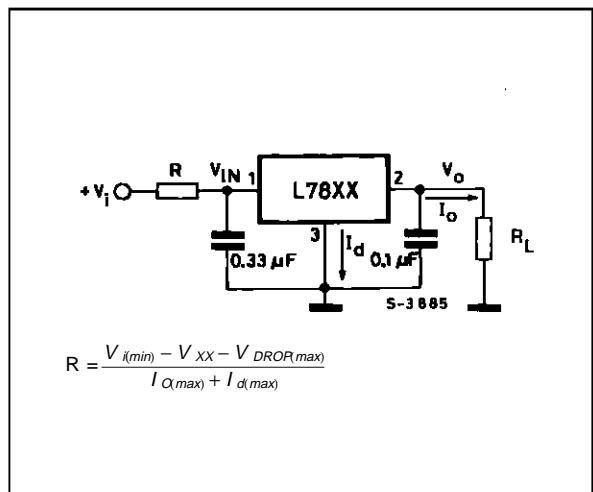


Figure 29 : Remote Shutdown.



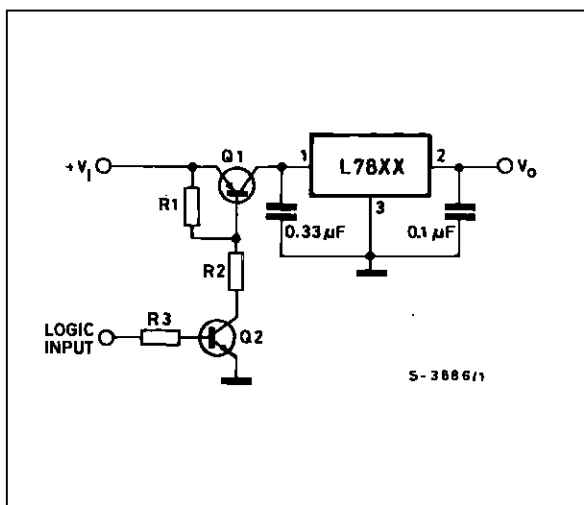


Figure 30 : Power AM Modulator (unity voltage gain, $I_o < 1A$).

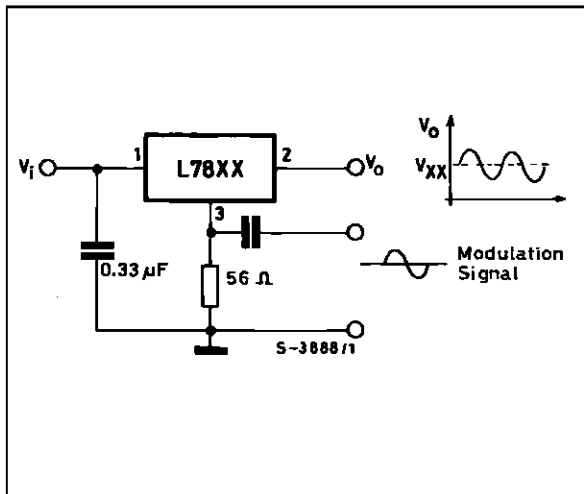

NOTE: The circuit performs well up to 100KHz

Figure 31 : Adjustable Output Voltage with Temperature Compensation.

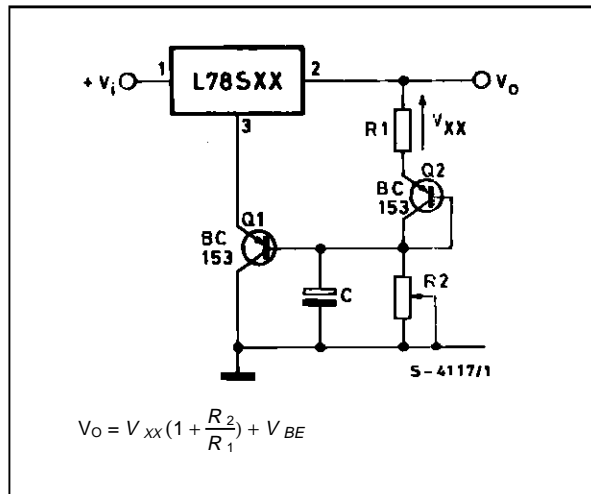

$$V_o = V_{xx} \left(1 + \frac{R_2}{R_1}\right) + V_{BE}$$

NOTE: Q₂ is connected as a diode in order to compensate the variation of the Q₁ V_{BE} with the temperature. C allows a slow rise-time of the V_o

Figure 32 : Light Controllers ($V_o \text{ min} = V_{xx} + V_{BE}$).


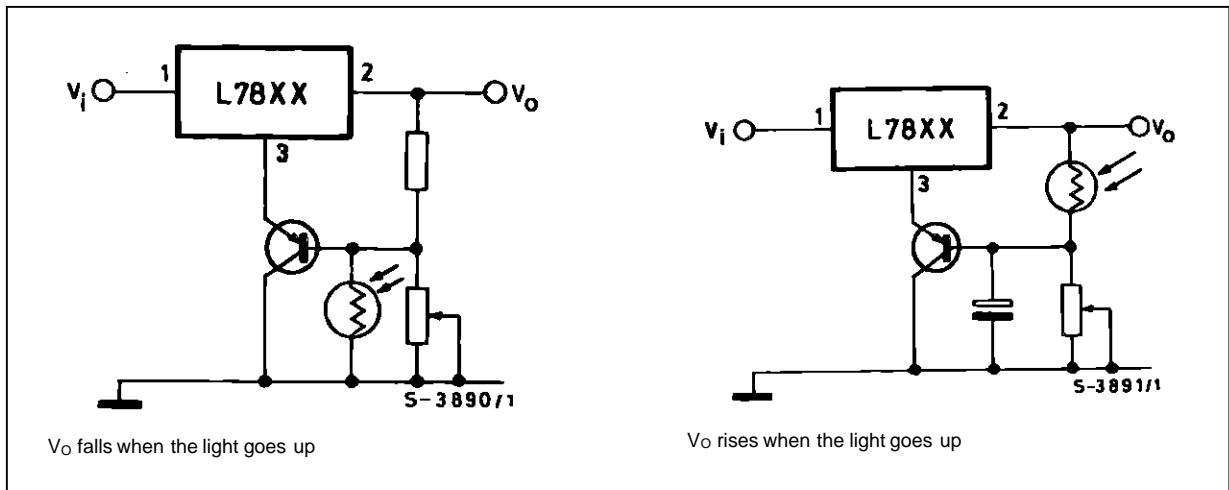



Figure 33 : Protection against Input Short-circuit with High Capacitance Loads.

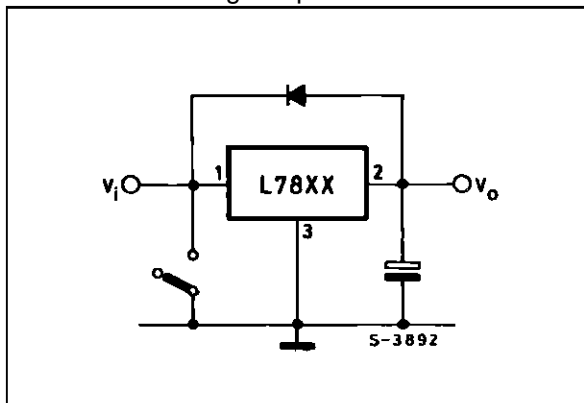

Application with high capacitance loads and an output voltage greater than 6 volts need an external diode (see fig. 33) to protect the device against input short circuit. In this case the input voltage falls rapidly while the output voltage decrease slowly. The capacitance discharges by means of the Base-Emitter junction of the series pass transistor in the regulator. If the energy is sufficiently high, the transistor may be destroyed. The external diode by-passes the current from the IC to ground.


TO-3 (R) MECHANICAL DATA

| DIM. | mm | | | inch | | |
|------|------|-------|-------|-------|-------|-------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | | 11.7 | | | 0.460 | |
| B | 0.96 | | 1.10 | 0.037 | | 0.043 |
| C | | | 1.70 | | | 0.066 |
| D | | | 8.7 | | | 0.342 |
| E | | | 20.0 | | | 0.787 |
| G | | 10.9 | | | 0.429 | |
| N | | 16.9 | | | 0.665 | |
| P | | | 26.2 | | | 1.031 |
| R | 3.88 | | 4.09 | 0.152 | | 0.161 |
| U | | | 39.50 | | | 1.555 |
| V | | 30.10 | | | 1.185 | |

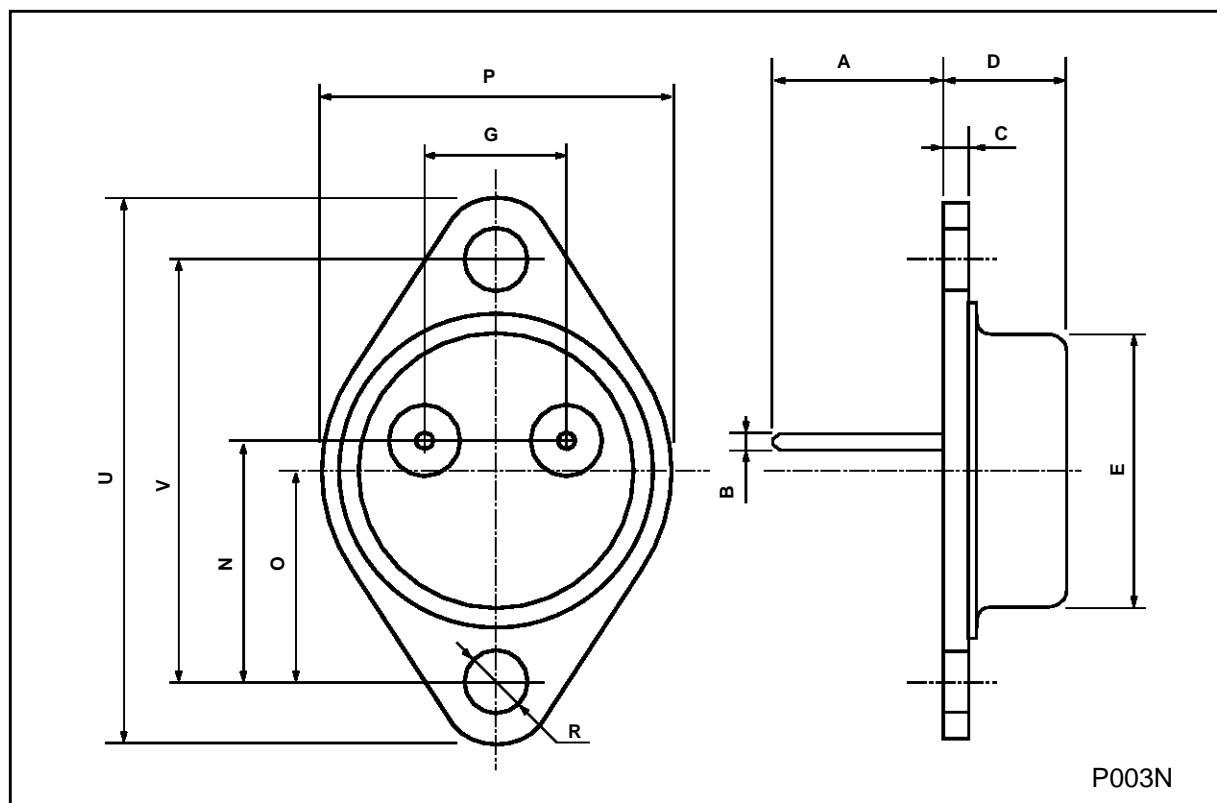


TO-220 MECHANICAL DATA

| DIM. | mm | | | inch | | |
|------|-------|------|-------|-------|-------|-------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | 4.40 | | 4.60 | 0.173 | | 0.181 |
| C | 1.23 | | 1.32 | 0.048 | | 0.051 |
| D | 2.40 | | 2.72 | 0.094 | | 0.107 |
| D1 | | 1.27 | | | 0.050 | |
| E | 0.49 | | 0.70 | 0.019 | | 0.027 |
| F | 0.61 | | 0.88 | 0.024 | | 0.034 |
| F1 | 1.14 | | 1.70 | 0.044 | | 0.067 |
| F2 | 1.14 | | 1.70 | 0.044 | | 0.067 |
| G | 4.95 | | 5.15 | 0.194 | | 0.203 |
| G1 | 2.4 | | 2.7 | 0.094 | | 0.106 |
| H2 | 10.0 | | 10.40 | 0.393 | | 0.409 |
| L2 | | 16.4 | | | 0.645 | |
| L4 | 13.0 | | 14.0 | 0.511 | | 0.551 |
| L5 | 2.65 | | 2.95 | 0.104 | | 0.116 |
| L6 | 15.25 | | 15.75 | 0.600 | | 0.620 |
| L7 | 6.2 | | 6.6 | 0.244 | | 0.260 |
| L9 | 3.5 | | 3.93 | 0.137 | | 0.154 |
| DIA. | 3.75 | | 3.85 | 0.147 | | 0.151 |

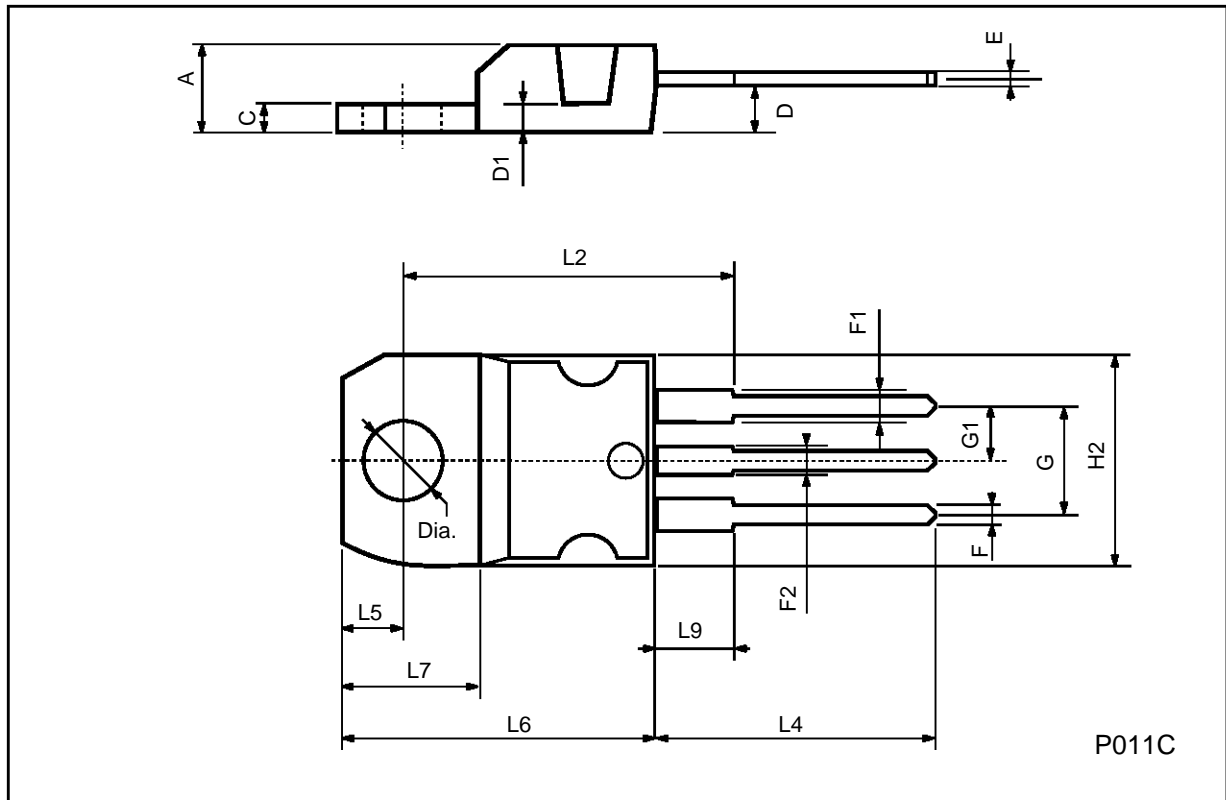


ISOWATT220 MECHANICAL DATA

| DIM. | mm | | | inch | | |
|------|------|------|------|-------|-------|-------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | 4.4 | | 4.6 | 0.173 | | 0.181 |
| B | 2.5 | | 2.7 | 0.098 | | 0.106 |
| D | 2.5 | | 2.75 | 0.098 | | 0.108 |
| E | 0.4 | | 0.7 | 0.015 | | 0.027 |
| F | 0.75 | | 1 | 0.030 | | 0.039 |
| F1 | 1.15 | | 1.7 | 0.045 | | 0.067 |
| F2 | 1.15 | | 1.7 | 0.045 | | 0.067 |
| G | 4.95 | | 5.2 | 0.195 | | 0.204 |
| G1 | 2.4 | | 2.7 | 0.094 | | 0.106 |
| H | 10 | | 10.4 | 0.393 | | 0.409 |
| L2 | | 16 | | | 0.630 | |
| L3 | 28.6 | | 30.6 | 1.126 | | 1.204 |
| L4 | 9.8 | | 10.6 | 0.385 | | 0.417 |
| L6 | 15.9 | | 16.4 | 0.626 | | 0.645 |
| L7 | 9 | | 9.3 | 0.354 | | 0.366 |
| Ø | 3 | | 3.2 | 0.118 | | 0.126 |

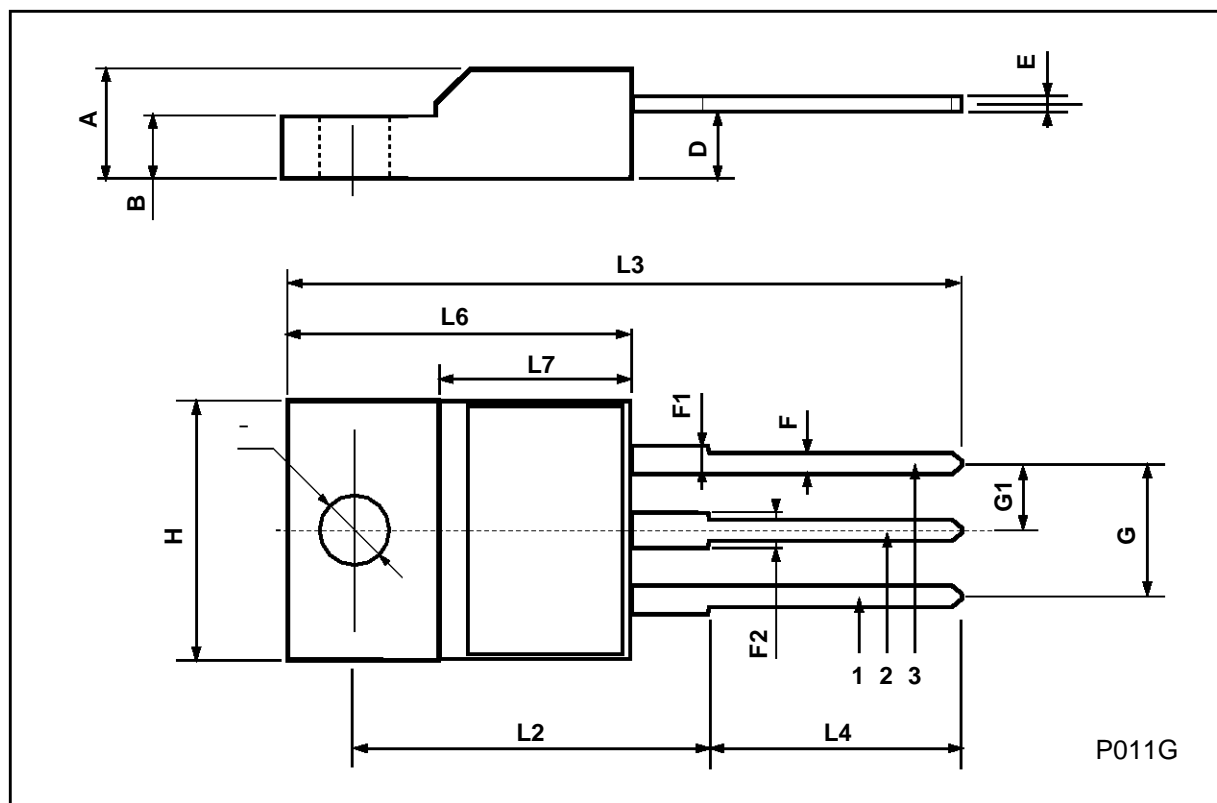

TO-263 (D²PAK) MECHANICAL DATA

| DIM. | mm | | | inch | | |
|------|------|------|-------|-------|------|-------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | 4.3 | | 4.6 | 0.169 | | 0.181 |
| A1 | 2.49 | | 2.69 | 0.098 | | 0.106 |
| B | 0.7 | | 0.93 | 0.027 | | 0.036 |
| B2 | 1.25 | | 1.4 | 0.049 | | 0.055 |
| C | 0.45 | | 0.6 | 0.017 | | 0.023 |
| C2 | 1.21 | | 1.36 | 0.047 | | 0.053 |
| D | 8.95 | | 9.35 | 0.352 | | 0.368 |
| E | 10 | | 10.28 | 0.393 | | 0.404 |
| G | 4.88 | | 5.28 | 0.192 | | 0.208 |
| L | 15 | | 15.85 | 0.590 | | 0.624 |
| L2 | 1.27 | | 1.4 | 0.050 | | 0.055 |
| L3 | 1.4 | | 1.75 | 0.055 | | 0.068 |

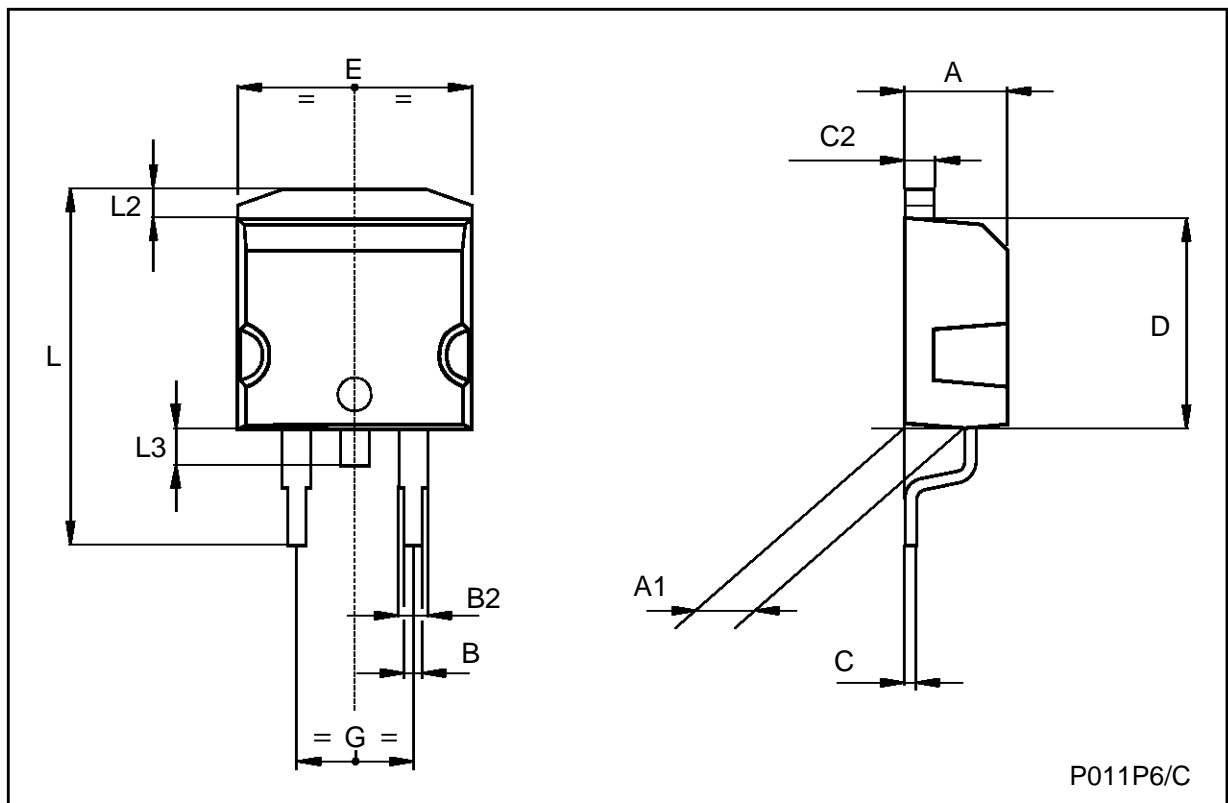

P011P6/C

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1997 SGS-THOMSON Microelectronics - Printed in Italy - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A