

DOUBLE DIODE - PENTODE

Double diode-pentode. Pentode intended for use as R.F. or I.F. amplifier.

QUICK REFERENCE DATA

Pentode section

Variable transconductance

Anode current	I_a	9 mA
---------------	-------	------

Transconductance	S	4.5 mA/V
------------------	-----	----------

Amplification factor	$\mu_{g_2 g_1}$	20 --
----------------------	-----------------	-------

HEATING: Indirect by A.C. or D.C.; parallel or series supply



Heater voltage	V_f	6.3 V
----------------	-------	-------

Heater current	I_f	300 mA
----------------	-------	--------

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

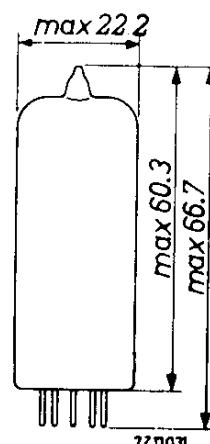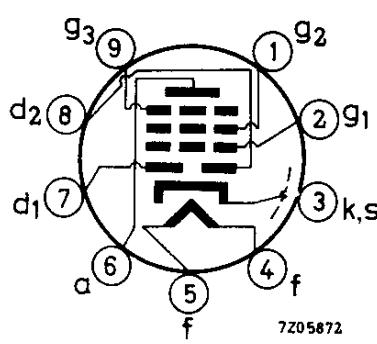

CAPACITANCESPentode section

Anode to all except grid No.1	$C_{a(g_1)}$	5.2	pF
Grid No.1 to all except anode	$C_{g_1(a)}$	5.0	pF
Anode to grid No.1	C_{ag_1}	max.	0.0025 pF
Grid No.1 to heater	C_{g_1f}	max.	0.05 pF

Diode sections

Diode No.1 to all	C_{d_1}	2.5	pF
Diode No.2 to all	C_{d_2}	2.5	pF
Diode No.1 to diode No.2	$C_{d_1d_2}$	max.	0.25 pF
Diode No.1 to heater	C_{d_1f}	max.	0.015 pF
Diode No.2 to heater	C_{d_2f}	max.	0.003 pF

Between diode and pentode sections

Diode No.1 to grid No.1	$C_{d_1g_1}$	max.	0.0008 pF
Diode No.2 to grid No.1	$C_{d_2g_1}$	max.	0.001 pF
Diode No.1 to anode	C_{d_1a}	max.	0.15 pF
Diode No.2 to anode	C_{d_2a}	max.	0.025 pF

TYPICAL CHARACTERISTICSPentode section

Anode voltage	V_a	250	250	200	170	V
Grid No. 2 voltage	V_{g_2}	100	80	100	100	V
Grid No. 3 voltage	V_{g_3}	0	0	0	0	V
Grid No. 1 voltage	V_{g_1}	-2	-1 1)	-1.5	-1 1)	V
Anode current	I_a	9	9	11	12	mA
Grid No. 2 current	I_{g_2}	2.7	2.7	3.3	4	mA
Transconductance	S	3.8	4.5	4.5	5	mA/V
Amplification factor	$\mu_{g_2 g_1}$	20	20	20	20	-
Internal resistance	R_i	1.0	0.9	0.6	0.4	MΩ

OPERATING CHARACTERISTICSPentode section as R.F. or I.F. amplifier

Supply voltage	V_b	250	200	250	V
Anode resistor	R_a	0	0	0	Ω
Grid No. 3 voltage	V_{g_3}	0	0	0	V
Grid No. 2 resistor	R_{g_2}	56	30	62	kΩ
Grid No. 1 voltage	V_{g_1}	-2.0 -20	-1.5 -20	-1 1) -20	V
Anode current	I_a	9 -	11 -	9 -	mA
Grid No. 2 current	I_{g_2}	2.7 -	3.3 -	2.7 -	mA
Transconductance	S	3.8 0.2	4.5 0.12	4.5 0.2	mA/V
Internal resistance	R_i	1.0 -	0.6 -	0.9 -	MΩ

¹⁾ To avoid grid No. 1 current the negative grid No. 1 voltage should be min. 1.5 V.

LIMITING VALUES (Design centre rating system)Pentode section

Anode voltage	V_{a_0}	max. 550 V
Anode dissipation	W_a	max. 300 V ¹⁾
Grid No. 2 voltage	$V_{g_{20}}$	max. 2.25 W
Grid No. 2 voltage	V_{g_2}	max. 550 V
at anode current I_a max. 4 mA	V_{g_2}	max. 300 V ¹⁾
at anode current I_a min. 8 mA	V_{g_2}	max. 125 V
Grid No. 2 dissipation	W_{g_2}	max. 0.45 W
Cathode current	I_k	max. 16.5 mA
Grid No. 1 resistor	R_{g_1}	max. 3 MΩ
Grid No. 3 resistor	R_{g_3}	max. 10 kΩ
Cathode to heater voltage	V_{kf}	max. 100 V

Diode sections (each diode)

Diode voltage, negative peak	$-V_{dp}$	max. 200 V
Diode current, average	I_d	max. 0.8 mA
peak	I_{dp}	max. 5 mA
Cathode to heater voltage	V_{kf}	max. 100 V

¹⁾ With supply from a storage battery and vibrator the max. voltage is 250 V.