
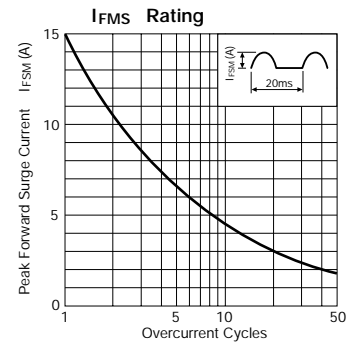






# Fast-Recovery Rectifier Diodes

Type No.	Parameter	Absolute Maximum Ratings					Electrical Characteristics (Ta=25°C)						Others													
		V <sub>RM</sub> (V)	I <sub>F(AV)</sub> (A)	I <sub>FSM</sub> (A)	T <sub>J</sub> (°C)	T <sub>stg</sub> (°C)	V <sub>F</sub> (V)		I <sub>R</sub> (μA)	I <sub>R(H)</sub> (μA)	t <sub>rr</sub> ① (μs)	t <sub>rr</sub> ② (μs)	R <sub>th(j-ℓ)</sub> (°C/W)	Mass (g)	Fig.											
							max	I <sub>F</sub> (A)	V <sub>R</sub> =V <sub>RM</sub> max	V <sub>R</sub> =V <sub>RM</sub> Ta=100°C max																
EU01Z	200	0.25	15	-40 to +150	1.4	1.0	10	300	0.4	10/10	0.18	10/20	20	0.2	Ⓐ											
EU01	400																									
EU01A	600																									
EU02Z	200	1.0	15													1.4	1.0	10	300	0.4	10/10	0.18	10/20	20	0.2	Ⓐ
EU02	400																									
EU02A	600																									
EU 1Z	200	0.25	15	1.4	1.0	10	300	0.4	10/10	0.18	10/20	17	0.3	Ⓑ												
EU 1	400																									
EU 1A	600																									




## EU01 series



## EU02 series

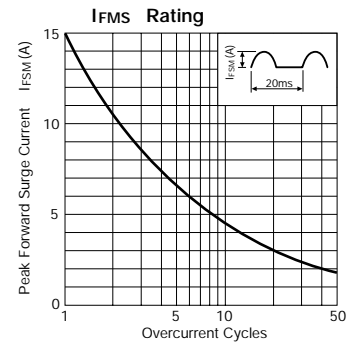

## EU 1 series

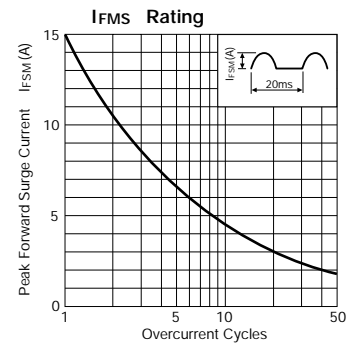

## External Dimensions

(Unit: mm)

Flammability:  
UL94V-0 or Equivalent

