


# 74118

4 RS-Flipflops mit gemeinsamem Rücksteleingang  
 4 RS-flip flops with common clear  
 4 flip-flops RS avec entrées communes de rappel à zéro  
 4 flipflop RS con entrate di risposizionamento comune

Pin	FI
R	5

Logiktablelle siehe Section 1  
 Function table see section 1  
 Tableau logique voir section 1  
 Per tavola di logica vedi sec. 1

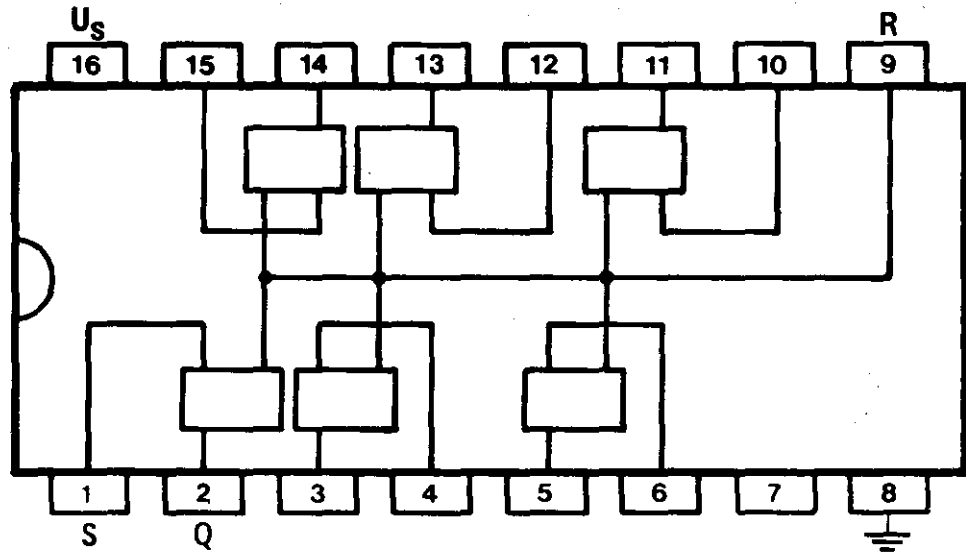

74118	Typ - Type - Type - Tipo			Hersteller Manufact. Fabricants Produttori	B Sect. 3	P <sub>typ</sub> SP <sub>max</sub> &PD mW	tp		tp		Bem. - Note	
	T <sub>U</sub> = 0...70°C 50...75°C	T <sub>U</sub> = -25...85°C 5-40...85°C	T <sub>U</sub> = -55...125°C				R→Q	S→Q	f <sub>T</sub> f <sub>Z</sub> &f <sub>E</sub> MHz	*U <sub>Hmin</sub> /U <sub>Lmax</sub> V		
FLJ 361	FLJ 365	MIC 54118 J	Sie	6a	150	18	§29	§17				
SMIC 74118 J			ITT	6b	150	18	§29	§17				
SMIC 74118 N	SN 84118 N	SN 54118 J SN 54118 N	ITT	6a	150	18	§29	§17				
SN 74118 J			Tix	6c	150	18	§29	§17				
SN 74118 N			Tix	6a	150	18	§29	§17				
TL 74118 N			AEG	6a	150	18	§29	§17				