


FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

$\varnothing 16^{+0.2}_{-0}$
 PANEL CUTOUT
 MAX.PANEL THICKNESS
 6mm

$\varnothing 17$
 $\varnothing 15$
 0.6
 Seal Ring

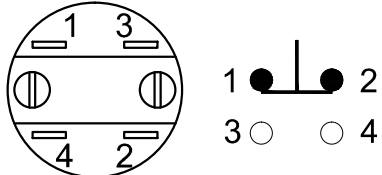

Contact Composition
 1, 2, 3, 4 are one set;
 1,2 are normal closed(NC);
 3,4 are normal opened(NO).

Part Number: LAS1J- 11Y/◇/JC

"◇"	Operation position
2	Two Position $\begin{matrix} L \\ R \end{matrix}$

SPECIFICATIONS:

- 1.Switch Rating: AC220V/2A, DC220V/0.1A.
- 2.Mechanical Life: $\geq 500,000$ cycles.
- 3.Electrical Life: $\geq 50,000$ cycles.
- 4.Contact Resistance: $\leq 50m\Omega$.
- 5.Insulation Resistance: $\geq 100M\Omega$.
- 6.Dielectric Strength:
Between terminals of the same pole: AC 1,500V, RMS 50Hz, 1min;
Between terminals of different pole: AC 2,000V, RMS 50Hz, 1min.
- 7.Operating Temperature: $-25^{\circ}C \sim +55^{\circ}C$ (No Freezing).
- 8.IP Class: IP40.
- 9.Terminal Type: Pin Terminal(2.8 x 0.5mm).

MATERIALS:

- 1.Contact: Silver alloy.
- 2.Button: PC.
- 3.Body: PC.
- 4.Base: PC.

BRAND 品牌 ONPOW	红波按钮制造有限公司 ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.	USED 用途	APPD 审核	CH 2020/05/03
	FINISH 处理	CHKD 校对	NCH 2020/05/03
	SCALE 比例 1.6 / 1	UNIT 单位 mm	DR. 制图 ZPD 2020/05/03
DIMENSIONS	TOLERANCE	TITLE 名称 LAS1 Series Pushbutton Switches	
0.00 TO 18.00mm	$\pm 0.43mm$	DWG NO. 图号 LAS1J- 11Y-JC	SIZE 图纸 A4
18.01 TO 30.00mm	$\pm 0.52mm$	FILE NAME 档案名称 LAS1-Y.DWG	SHEET 张 1 / 1
30.01 TO 50.00mm	$\pm 0.62mm$	REV. 更改 1	1
50.01 TO 80.00mm	$\pm 0.74mm$		