



RXW Series

Features

- 105°C, 4,000 ~ 7,000 hours assured
- Low ESR, suitable for switching power supplies
- Smaller size with large permissible ripple current
- RoHS Compliance




Sleeve & Marking Color: Black & Golden

Specifications


Items	Performance																																												
Category Temperature Range	6.3 ~ 63V -55°C ~ +105°C				100V -40°C ~ +105°C																																								
Capacitance Tolerance	± 20 % (at 120Hz, 20°C)																																												
Leakage Current (at 20°C)	I = 0.01CV or 3 (μ A) whichever is greater (after 2 minutes) Where, C = rated capacitance in μ F V = rated DC working voltage in V																																												
Tanδ (at 120 Hz, 20°C)	<table border="1"> <tr> <td>Rated Voltage</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <td>Tanδ (max)</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.09</td> <td>0.08</td> </tr> </table> <p>When the capacitance exceeds 1000μF, 0.02 shall be added every 1000μF increase.</p>									Rated Voltage	6.3	10	16	25	35	50	63	100	Tanδ (max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08																		
Rated Voltage	6.3	10	16	25	35	50	63	100																																					
Tanδ (max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08																																					
Low Temperature Characteristics (at 120Hz)	<table border="1"> <tr> <td>Rated Voltage</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <td>Impedance Ratio</td> <td>Z(-55°C/-40°C) / Z(+20°C)</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table>									Rated Voltage	6.3	10	16	25	35	50	63	100	Impedance Ratio	Z(-55°C/-40°C) / Z(+20°C)	3	3	3	3	3	3	3																		
Rated Voltage	6.3	10	16	25	35	50	63	100																																					
Impedance Ratio	Z(-55°C/-40°C) / Z(+20°C)	3	3	3	3	3	3	3																																					
Endurance	<table border="1"> <tr> <td>Test Time</td> <td colspan="8">4,000 Hrs for $\phi D \leq 6.3$ mm; 5,000 Hrs for $\phi D = 8$ mm; 6,000 Hrs for $\phi D = 10$ mm; 7,000 Hrs for $\phi D \geq 12.5$ mm</td></tr> <tr> <td>Capacitance Change</td> <td colspan="8">Within ±25% of initial value</td></tr> <tr> <td>Tanδ</td> <td colspan="8">Less than 200% of specified value</td></tr> <tr> <td>Leakage Current</td> <td colspan="8">Within specified value</td></tr> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied with rated ripple current for 4,000 ~ 7,000 hours at 105°C.</p>									Test Time	4,000 Hrs for $\phi D \leq 6.3$ mm; 5,000 Hrs for $\phi D = 8$ mm; 6,000 Hrs for $\phi D = 10$ mm; 7,000 Hrs for $\phi D \geq 12.5$ mm								Capacitance Change	Within ±25% of initial value								Tanδ	Less than 200% of specified value								Leakage Current	Within specified value							
Test Time	4,000 Hrs for $\phi D \leq 6.3$ mm; 5,000 Hrs for $\phi D = 8$ mm; 6,000 Hrs for $\phi D = 10$ mm; 7,000 Hrs for $\phi D \geq 12.5$ mm																																												
Capacitance Change	Within ±25% of initial value																																												
Tanδ	Less than 200% of specified value																																												
Leakage Current	Within specified value																																												
Shelf Life Test	<table border="1"> <tr> <td>Test Time</td> <td colspan="8">1,000 Hrs</td></tr> <tr> <td>Capacitance Change</td> <td colspan="8">Within ±25% of initial value</td></tr> <tr> <td>Tanδ</td> <td colspan="8">Less than 200% of specified value</td></tr> <tr> <td>Leakage Current</td> <td colspan="8">Within specified value</td></tr> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.</p>									Test Time	1,000 Hrs								Capacitance Change	Within ±25% of initial value								Tanδ	Less than 200% of specified value								Leakage Current	Within specified value							
Test Time	1,000 Hrs																																												
Capacitance Change	Within ±25% of initial value																																												
Tanδ	Less than 200% of specified value																																												
Leakage Current	Within specified value																																												
Ripple Current & Frequency Multipliers	<table border="1"> <tr> <td>Freq.(Hz)</td> <td>120</td> <td>1k</td> <td>10k</td> <td>100k up</td> </tr> <tr> <td>Cap.(μF)</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>under ~ 33</td> <td>0.42</td> <td>0.70</td> <td>0.90</td> <td>1.0</td> </tr> <tr> <td>39 ~ 270</td> <td>0.5</td> <td>0.73</td> <td>0.92</td> <td>1.0</td> </tr> <tr> <td>330 ~ 680</td> <td>0.55</td> <td>0.77</td> <td>0.94</td> <td>1.0</td> </tr> <tr> <td>820 ~ 1,800</td> <td>0.6</td> <td>0.80</td> <td>0.96</td> <td>1.0</td> </tr> <tr> <td>2,200 ~ 15,000</td> <td>0.7</td> <td>0.85</td> <td>0.98</td> <td>1.0</td> </tr> </table>									Freq.(Hz)	120	1k	10k	100k up	Cap.(μ F)					under ~ 33	0.42	0.70	0.90	1.0	39 ~ 270	0.5	0.73	0.92	1.0	330 ~ 680	0.55	0.77	0.94	1.0	820 ~ 1,800	0.6	0.80	0.96	1.0	2,200 ~ 15,000	0.7	0.85	0.98	1.0	
Freq.(Hz)	120	1k	10k	100k up																																									
Cap.(μ F)																																													
under ~ 33	0.42	0.70	0.90	1.0																																									
39 ~ 270	0.5	0.73	0.92	1.0																																									
330 ~ 680	0.55	0.77	0.94	1.0																																									
820 ~ 1,800	0.6	0.80	0.96	1.0																																									
2,200 ~ 15,000	0.7	0.85	0.98	1.0																																									

Diagram of Dimensions

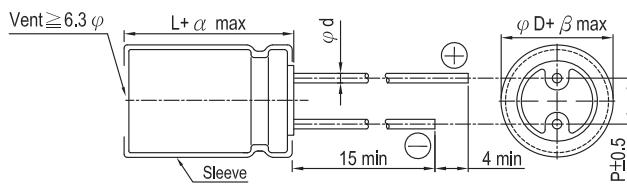

Lead Spacing and Diameter Unit: mm							
ϕD	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
ϕd	0.5		0.6			0.8	
α	L<20: 1.5, L≥20: 2.0						
β	0.5						

The case size of 16×20, 18×20 and 18×25 are suitable for below diagram:

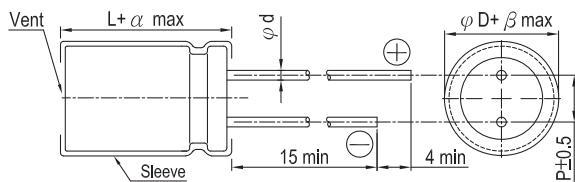

Dimension: $\phi D \times L$ (mm)

Ripple Current: mA/rms at 100k Hz, 105°C

Dimension & permissible Ripple Current

V. DC Contents μF	6.3V (0J)			10V (1A)			16V (1C)			25V (1E)							
	$\phi D \times L$	Impedance (Ω , Max/100kHz)		$\phi D \times L$	Impedance (Ω , Max/100kHz)		$\phi D \times L$	Impedance (Ω , Max/100kHz)		$\phi D \times L$	Impedance (Ω , Max/100kHz)		$\phi D \times L$	Impedance (Ω , Max/100kHz)			
		20°C	-10°C		20°C	-10°C		20°C	-10°C		20°C	-10°C		20°C	-10°C		
4.7														5x11	0.6	1.2	180
10										5x11	0.6	1.2	180	5x11	0.6	1.2	180
22	5x11	0.6	1.2	180	5x11	0.6	1.2	180	5x11	0.6	1.2	180	5x11	0.6	1.2	180	
33	5x11	0.6	1.2	180	5x11	0.6	1.2	180	5x11	0.6	1.2	180	5x11	0.6	1.2	180	
39														5x11	0.6	1.2	180
47	5x11	0.6	1.2	180	5x11	0.6	1.2	180	5x11	0.6	1.2	180	5x11	0.6	1.2	180	
56									5x11	0.6	1.2	180					
82					5x11	0.6	1.2	180					6.3x11	0.25	0.50	290	
100	5x11	0.6	1.2	180	5x11	0.6	1.2	180	6.3x11	0.25	0.5	290	6.3x11	0.25	0.50	290	
120									6.3x11	0.25	0.5	290	6.3x15	0.23	0.46	430	
150	6.3x11	0.25	0.5	290	6.3x11	0.25	0.5	290	6.3x11	0.25	0.5	290	8x11.5	0.117	0.234	555	
180					6.3x11	0.25	0.5	290	6.3x15	0.23	0.46	430					
220	6.3x11	0.25	0.5	290	6.3x11	0.25	0.5	290	8x11.5	0.117	0.234	555	8x11.5	0.117	0.234	555	
330	6.3x11 6.3x15	0.25 0.23	0.50 0.46	290 430	8x11.5	0.117	0.234	555	8x11.5	0.117	0.234	555	8x15 10x12.5	0.085 0.090	0.17 0.18	730 755	
470	8x11.5	0.117	0.234	555	8x11.5	0.117	0.234	555	8x15 10x12.5	0.085 0.090	0.17 0.18	730 755	8x20 10x16	0.065 0.068	0.130 0.136	995 1,050	
560	8x11.5	0.117	0.234	555									10x20	0.052	0.104	1,220	
680	10x12.5	0.090	0.180	755	8x15 10x12.5	0.085 0.090	0.170 0.180	730 755	8x20 10x16	0.065 0.068	0.130 0.136	995 1,050	10x20	0.052	0.104	1,220	
820	8x15 10x12.5	0.085 0.090	0.170 0.180	730 755					10x20	0.052	0.104	1,220	10x25	0.045	0.090	1,440	
1,000	10x12.5	0.090	0.180	755	8x20 10x16	0.065 0.068	0.130 0.136	995 1,050	10x20	0.052	0.104	1,220	10x30 12.5x20	0.035 0.038	0.070 0.076	1,815 1,655	
1,200	8x20 10x16	0.065 0.068	0.130 0.136	955 1,050	10x20	0.052	0.104	1,220	10x25	0.045	0.090	1,440					
1,500	10x20	0.052	0.104	1,220	10x20 10x25	0.052 0.045	0.104 0.090	1,220 1,440	12.5x20 10x30	0.038 0.035	0.076 0.070	1,655 1,815	12.5x25 16x25	0.030 0.022	0.060 0.044	1,945 2,555	
1,800													12.5x30 16x20	0.025 0.029	0.050 0.058	2,310 2,205	
2,200	10x25 12.5x20	0.045 0.038	0.090 0.076	1,440 1,615	10x30 12.5x20	0.035 0.038	0.070 0.076	1,815 1,655	12.5x25	0.030	0.06	1,945	12.5x35 16x25 18x20	0.022 0.022 0.028	0.044 0.044 0.056	2,510 2,555 2,490	
2,700	10x30	0.035	0.070	1,815	12.5x25	0.030	0.060	1,945	12.5x30 16x20	0.025 0.029	0.05 0.058	2,310 2,205	16x25	0.022	0.044	2,555	
3,300	12.5x20	0.038	0.076	1,655	12.5x25 12.5x30	0.030 0.025	0.060 0.050	1,945 2,310	16x25 12.5x35	0.022 0.022	0.044 0.044	2,555 2,510	16x31.5 18x25	0.018 0.020	0.036 0.040	3,010 2,740	
3,900	12.5x25	0.030	0.060	1,945	12.5x35	0.022	0.044	2,510	16x25	0.022	0.044	2,555	16x35.5	0.016	0.032	3,150	
4,700	12.5x30 16x25	0.025 0.022	0.050 0.044	2,310 2,555	16x25	0.022	0.044	2,555	16x31.5 18x25	0.018 0.020	0.036 0.040	3,010 2,740	18x35.5	0.015	0.030	3,680	
5,600	12.5x35 16x20	0.022	0.044	2,510 2,205	16x25 18x20	0.022 0.028	0.044 0.056	2,555 2,490	16x35.5 18x31.5	0.016 0.016	0.032 0.032	3,150 3,635					
6,800	16x25 18x20	0.022	0.044	2,555 2,490	16x31.5 18x25	0.018 0.020	0.036 0.040	3,010 2,740	18x35.5	0.015	0.030	3,680	18x40	0.014	0.028	3,800	
8,200	16x31.5	0.018	0.036	3,010	16x35.5 18x31.5	0.016 0.016	0.032 0.032	3,150 3,635	18x35.5	0.015	0.030	3,680					
10,000	16x31.5 18x25	0.016 0.020	0.032 0.040	3,150 2,740	18x35.5	0.015	0.030	3,680	18x40	0.014	0.028	3,800					
12,000	18x31.5	0.016	0.032	3,635													
15,000	18x35.5	0.015	0.030	3,680	18x40	0.014	0.028	3,800									



Dimension & Permissible Ripple Current

Dimension: $\phi D \times L$ (mm)

Ripple Current: mA/rms at 100k Hz, 105°C

V. DC Contents μF	35V (1V)			50V (1H)			63V (1J)			100V (2A)		
	$\phi D \times L$	Impedance (Ω , Max/100kHz)		Ripple Current (mA/rms, 105°C)	$\phi D \times L$	Impedance (Ω , Max/100kHz)		Ripple Current (mA/rms, 105°C)	$\phi D \times L$	Impedance (Ω , Max/100kHz)		Ripple Current (mA/rms, 105°C)
		20°C	-10°C	100k Hz		20°C	-10°C	100k Hz		20°C	-10°C	100k Hz
2.2										5x11	9.8	19.6
3.3										5x11	6.6	13.2
4.7	5x11	0.6	1.2	180	5x11	2.3	4.6	90	5x11	4.7	9.4	68
6.8									5x11	2.5	5.0	95
10	5x11	0.6	1.2	180	5x11	1.4	2.8	120	5x11	2.1	4.2	110
12									5x11	2.0	4.0	145
15									6.3x11	1.2	2.4	160
18					5x11	1.3	2.6	155				6.3x15
22	5x11	0.6	1.2	180	5x11	1.2	2.4	170	6.3x11	0.71	1.42	250
27	5x11	0.6	1.2	180								
33	5x11	0.6	1.2	180	6.3x11	0.43	0.86	300	6.3x11	0.71	1.42	250
39									6.3x15	0.70	1.40	330
47	6.3x11	0.25	0.5	290	6.3x11	0.43	0.86	300	8x11.5	0.342	0.684	405
56	6.3x11	0.25	0.5	290	6.3x15	0.40	0.80	360				
68									8x11.5	0.342	0.684	405
82	6.3x15	0.23	0.46	430	8x11.5	0.234	0.468	485				10x25
100	8x11.5	0.117	0.234	555	8x11.5	0.234	0.468	485	10x12.5 8x15	0.256 0.230	0.512 0.460	535 535
120					8x15 10x12.5	0.155 0.162	0.310 0.324	635 615	10x16	0.194	0.388	600
150	8x11.5	0.117	0.234	555	10x12.5	0.162	0.324	615	10x16	0.194	0.388	660
180					8x20 10x16	0.120 0.119	0.240 0.238	860 850	10x20 12.5x16	0.147 0.150	0.294 0.300	885 1,020
220	8x15 10x12.5	0.085 0.090	0.17 0.18	730 755	10x16 10x20	0.119 0.090	0.238 0.180	850 1,030	10x20 10x25	0.147 0.130	0.294 0.260	885 1,050
270					10x25	0.082	0.164	1,200	16x16	0.090	0.180	1,410
330	8x20 10x16	0.065 0.068	0.130 0.136	995 1,050	10x20 10x30	0.090 0.060	0.180 0.120	1,030 1,610	12.5x20	0.085	0.170	1,285
390	10x20	0.052	0.104	1,220	12.5x20	0.063	0.126	1,480	12.5x25 18x16	0.070 0.086	0.140 0.172	1,720 1,690
470	10x20	0.052	0.104	1,220	12.5x20	0.060	0.120	1,500	12.5x25 18x25	0.070 0.043	0.140 0.086	1,720 2,585
560	10x25	0.045	0.090	1,440	12.5x25	0.050	0.100	1,832	16x25	0.050	0.100	2,160
680	10x30 12.5x20	0.035 0.038	0.070 0.076	1,815 1,655	12.5x25 16x20	0.050 0.048	0.100 0.096	1,832 1,835	12.5x35 18x20	0.047 0.055	0.094 0.110	2,265 2,290
820					12.5x35 18x20	0.034 0.042	0.068 0.084	2,285 2,200	16x31.5 18x25	0.043 0.043	0.086 0.086	2,670 2,585
1,000	12.5x25	0.030	0.060	1,945	16x25	0.034	0.068	2,235	16x31.5 16x35.5	0.043 0.036	0.086 0.072	2,670 2,770
1,200	12.5x30 16x20	0.025 0.029	0.050 0.058	2,310 2,205	16x31.5 18x25	0.028 0.029	0.056 0.058	2,700 2,610	18x31.5	0.032	0.064	2,950
1,500	12.5x35 16x25	0.022 0.022	0.044 0.044	2,510 2,555	16x31.5 16x35.5	0.028 0.025	0.056 0.050	2,700 2,790	18x35.5	0.030	0.060	3,095
1,800	16x25 18x20	0.022 0.028	0.044 0.056	2,555 2,490	18x31.5	0.025	0.05	3,000				
2,200	16x31.5 18x25	0.018 0.020	0.036 0.040	3,010 2,740	18x35.5	0.023	0.046	3,100	18x40	0.028	0.056	3,200
2,700	16x35.5 18x31.5	0.016 0.016	0.032 0.032	3,150 3,635								
3,300	18x35.5	0.015	0.030	3,680								
4,700	18x40	0.014	0.028	3,800								

Part Numbering System

RXW series	470 μF	$\pm 20\%$	6.3V	Bulk Package	Gas Type	8 $\phi \times 11.5L$	Pb-free and PET sleeve
RXW	471	M	0J	BK	-	0811	
Series	Capacitance	Capacitance Tolerance	Rated Voltage	Lead Configuration & Package	Rubber Type	Case Size	Lead Wire and Sleeve type

Note: For more details, please refer to "Part Numbering System (Radial Type)" on page 11.