

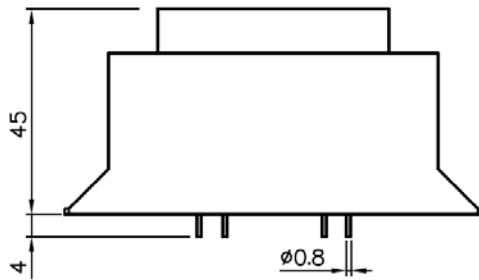


General tolerance: ± 0.5mm

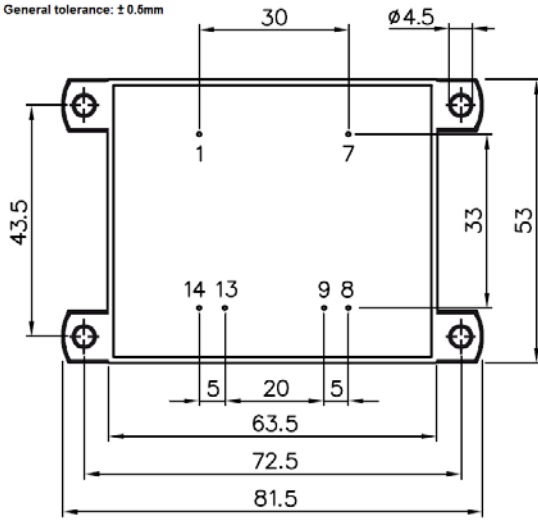



Single secondary version

Primary: pins 1 - 7
Secondary: pins 9 - 13



Double secondary version

Primary: pins 1 - 7
Secondary 1: pins 8 - 9
Secondary 2: pins 13 - 14

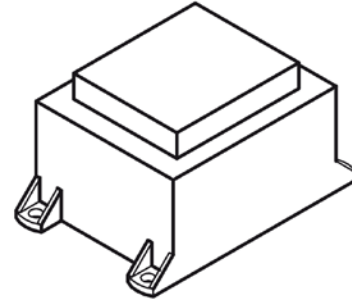

MAIN FEATURES

- Unitary insulation test at 5KV
- According EN 61558 European Standard (CE)
- All used materials are minimum Class B (130°C)
- Protection index: IP00
- Weight: 600gr
- Other voltages or pin-out under request

JESIVA Part nº	RATED POWER	PRIMARY	SECONDARY	TEMP	Recommended FUSE
E6021.20.1.06	20VA	230V	6V / 4.16A	70°C/B	Prim.125mA/T
E6021.20.1.07	20VA	230V	7.5V / 3.33A	70°C/B	Prim.125mA/T
E6021.20.1.09	20VA	230V	9V / 2.77A	70°C/B	Prim.125mA/T
E6021.20.1.12	20VA	230V	12V / 2.08A	70°C/B	Prim.125mA/T
E6021.20.1.15	20VA	230V	15V / 1.66A	70°C/B	Prim.125mA/T
E6021.20.1.18	20VA	230V	18V / 1.38A	70°C/B	Prim.125mA/T
E6021.20.1.24	20VA	230V	24V / 1.04A	70°C/B	Prim.125mA/T
E6021.20.2.06	20VA	230V	2x6V / 1.66A	70°C/B	Sec.2x2A/F
E6021.20.2.07	20VA	230V	2x7.5V / 2x1.33A	70°C/B	Sec.2x1.6A/F
E6021.20.2.09	20VA	230V	2x9V / 2x1.11A	70°C/B	Sec.2x1.25A/F
E6021.20.2.12	20VA	230V	2x12V / 2x0.83A	70°C/B	Sec.2x1A/F
E6021.20.2.15	20VA	230V	2x15V / 2x0.66A	70°C/B	Sec.2x0.80A/F
E6021.20.2.18	20VA	230V	2x18V / 2x0.55A	70°C/B	Sec.2x0.63/F
E6021.20.2.24*	20VA	230V	2x24V / 2x0.41A	70°C/B	Sec.2x0.50A/F

DATA SHEET

EI60/21

Encapsulated transformer



Code:

E6021.20.X.XX

Date:

Dec 2011

www.JESIVA.com