



STANDARD ENCAPSULATED

Format	Power	Weight
EI42/14.5	5 VA	200 grs.

Code	Primary	Secondary	Ta/DT/CT	Primary Protection	Secondary Protection
1122155	230V	2x15V-2x0.16A	40°C/35°C/B	-	2x200mA/F


HOMOLOGACIONES
UL Canada / UL USA / VDE / RoHS

MEASURES AND DIMENSIONS

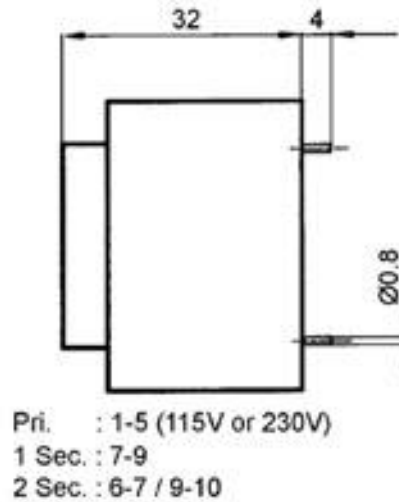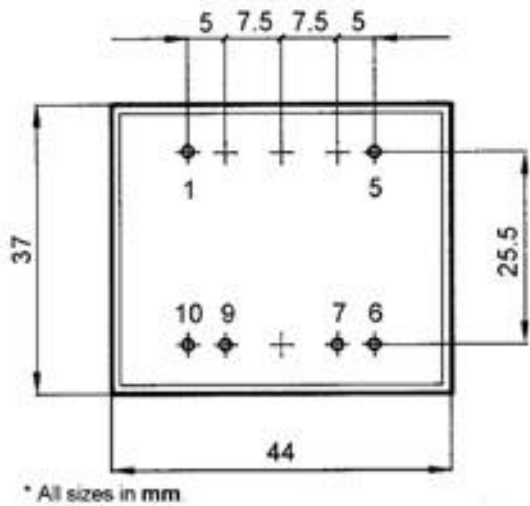


ESQUEMA

Conexión 1 Secundario / 1 Secondary Connections (Ejemplo / Example)



Conexión 2 Secundarios / 2 Secondary Connections (Ejemplo / Example)

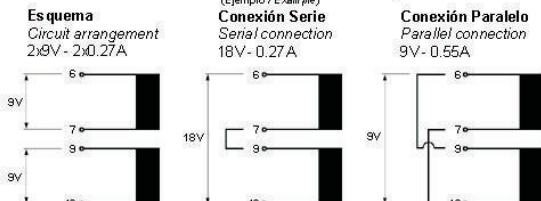

IMAGES

