



VOLTAGE RANGE: 200 --- 1000 V
CURRENT: 1.2 A

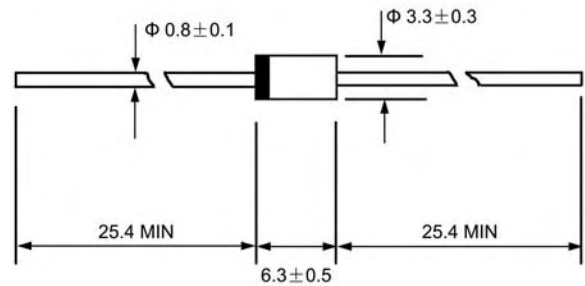
Features

- ◇ Low cost
- ◇ Diffused junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with Freon, Alcohol, Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

Mechanical Data

- ◇ Case: JEDEC DO--15, molded plastic
- ◇ Terminals: Axial lead, solderable per MIL- STD-202, Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.014 ounces, 0.39 grams
- ◇ Mounting position: Any

DO - 15



Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

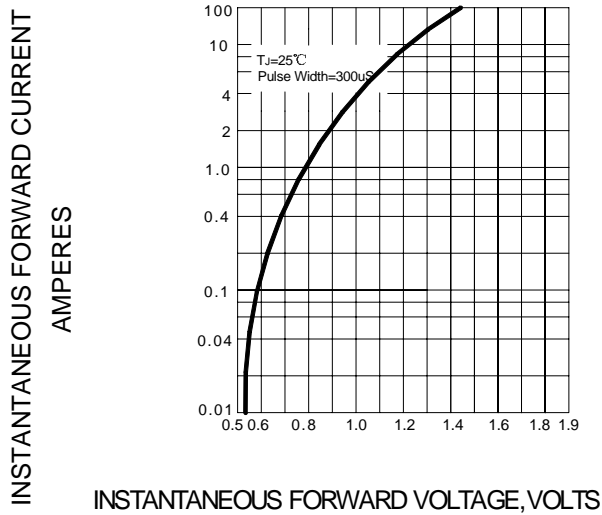
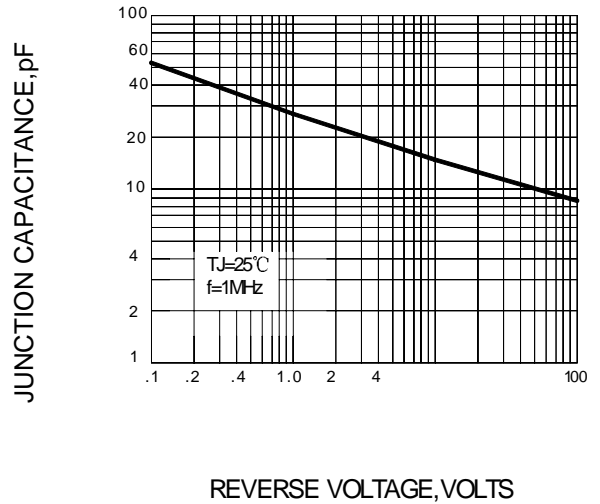
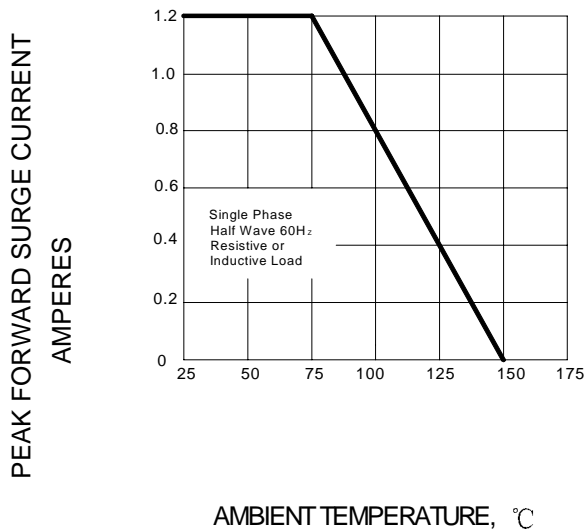
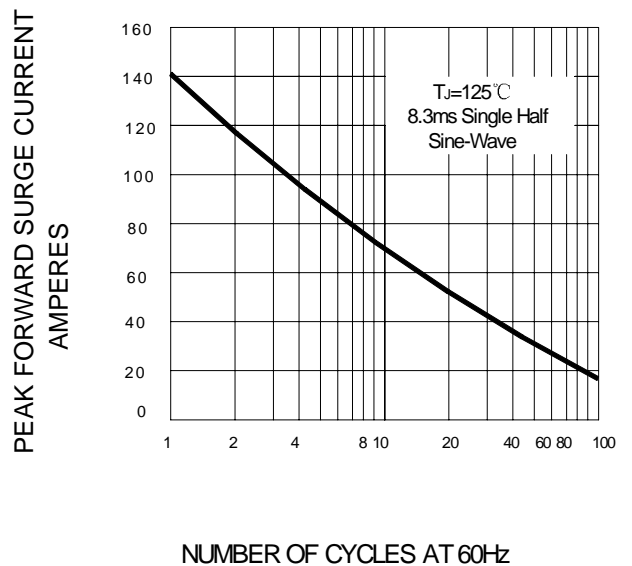
Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		ERC04 -02	ERC04 -04	ERC04 -06	ERC04 -10	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	200	400	600	1000	V
Maximum RMS voltage	V_{RMS}	140	280	420	700	V
Maximum DC blocking voltage	V_{DC}	200	400	600	1000	V
Maximum average forward rectified current 9.5mm lead length, @ $T_A=75^\circ C$	$I_{F(AV)}$	1.2				A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J=125^\circ C$	I_{FSM}	100				A
Maximum instantaneous forward voltage @ 4.0 A	V_F	1.1				V
Maximum reverse current @ $T_A=25^\circ C$ at rated DC blocking voltage @ $T_A=100^\circ C$	I_R	10 50				μA
Typical junction capacitance (Note1)	C_J	20				pF
Typical thermal resistance (Note2)	$R_{\theta JA}$	40				$^\circ C/W$
Operating junction temperature range	T_J	- 55 ---- + 150				$^\circ C$
Storage temperature range	T_{STG}	- 55 ---- + 150				$^\circ C$

NOTE: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

2. Thermal resistance from junction to ambient.

Ratings AND Characteristic Curves

FIG.1 – FORWARD CHARACTERISTIC

FIG.2 – JUNCTION CHARACTERISTICS

FIG.3 –CURRENT DERATING CURVE

FIG.4 –PEAK FORWARD SURGE CURRENT


PACKAGE	SPQ/PCS	CARTON SPQ/PCS	CARTON SIZE/CM	CARTON GW/KG	CARTON NW/KG
DO-15	3000/AMMO	30000	42X28X31	12.00	10.00

Download from alldatasheet