## Piezo Element

Customer			
Customer P/O			
BeStar Model Name	FT-27T-4.0A1		
Product No.	161900 BS/TEY01.076A		
Issue No.			
Issue Date	04/01/16		

### Approval:

- 1.Technical Terms
- 2.Drawing
- 3. Characteristics

BESTAR ELECTRONICS INDUSTRY CO.,LTD

TianAn Industry Park4/F,Site B ChangZhou New District

Tel:86-519-5103228 Fax:86-519-5131010 Http:www.be-star.com

E-Mail:bestarco@pub.cz.jsinfo.net

# FT-27T-4,0A<sub>1</sub>

#### 3. Characteristics:

#### 3.1 Solderability

300±10°C Temperaure of Merited Solder,2±0.5ec Duration of Dipping.

- 3.2 Lead pull off test
- a) Wire to be soldered on ceramic at the edge. It should withstand minimum 1.5 kg force applied in 180°. The wire should not come out before this .The ceramic can be either glued on a surface of can be held in hand. (Fig. 2)
- b) Wire to be soldered on ceramic at the edage&should be pulled up at 90° The element should be hold on bottom and wire should be pulled up .It should withstand at least for 3000gm force(Fig.1)

#### 3.3Bend Test

The element should be bend on to a pipe of 10mm diameter. The bend should be in only one direction. The length of pipeshould be at least 1.5 times the diameter of the brass disc.i.e for 20mm element ,the pipe should be at least 30mm .With this bend, ceramic cracking is allowed and chipping off of ceramic disc is not allowed

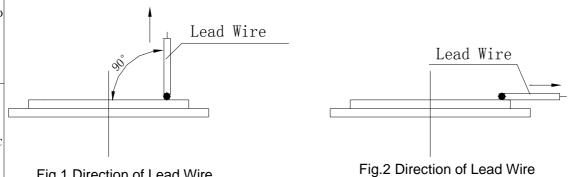


Fig.1 Direction of Lead Wire

L						
	DIS.		DATE		Page:2 of 2	FT 07T 4 0 4
	CHEC.		DATE		3rd angle	FT-27T-4.0A₁
	APPR.		DATE		projection	Piezo Element
Α	$\widehat{}$	/ DECTADELEC	1 1020 LIGHTOTIL			
	Bestor BESTAR ELECTRONICS INDUSTRY CO.,LTD					DRG NO
	Acou	sic TianAn Industry	BS/TEY01.076A			