

Jamicon Series : HX

Teapo Series : LP

Long Life Series




- Endurance: 105°C 10000hours
- Recommended Applications: Smoothing circuit, TV/Monitor,Adapter, SMPS
- Corresponding product to RoHS

**■ SPECIFICATIONS**

Item	Characteristics				
Category Temperature Range	-40 ~ +105°C				
Rated Voltage Range	200 ~ 450VDC				
Rated Capacitance Range	39 ~ 1500 µF				
Capacitance Tolerance	± 20 % (120Hz , 20°C)				
Leakage Current (20°C)	$I = \sqrt[3]{CV}$ . (After rated voltage applied for 5 minutes) I : Max. leakage current (µA), C : Nominal capacitance (µF), V : Rated voltage (V)				
Dissipation Factor(MAX) (tan δ) (120Hz ,20°C)	WV	200	250	400	450
	tan δ	0.15	0.15	0.20	0.20
Low Temperature Stability Impedance Ratio (MAX)	Measurement frequency : 120Hz				
	Rated voltage(V)	200~400	450		
	Z-25°C / Z+20°C	4	8		
Endurance	After applying rated voltage with rated Ripple current for 10000hrs at 105°C,when the capacitors are restored to 20°C , the capacitor shall meet the following requirement.				
	Capacitance change	Within ± 20% of initial value			
	D.F. (tan δ)	Not more than 250% of specified value			
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for1,000 hours at 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.				
	Leakage current	Not more than the specified value			

**■ Dimensions [mm]**

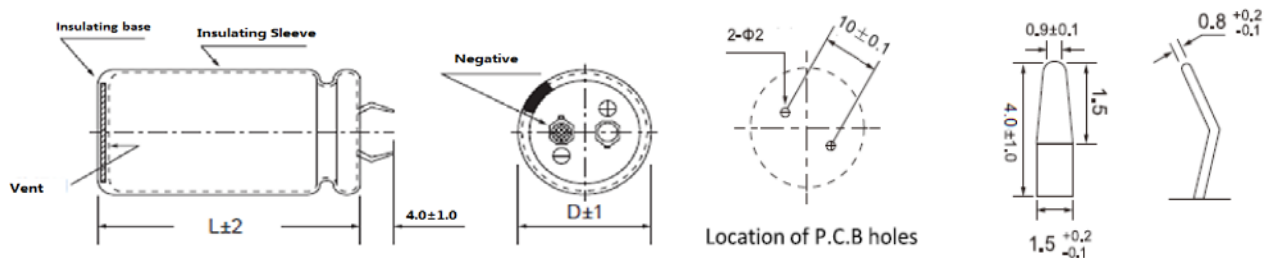

※When the code 11~13 of part number is S1G, the terminal length of standard capacitor is 4.0±1.0mm, and when it is S1A, the terminal length of standard capacitor is 5.8±1.0mm.

**■ Multiplier for Ripple Current**

Freq. (Hz)	60(50)	120	500	1K	≥ 10K
200~250WV	0.80	1.00	1.20	1.30	1.45
315~450WV	0.80	1.00	1.20	1.25	1.40

Jamicon Series : HX

Teapo Series : LP

■ STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap ( $\mu$ F)	Case size $\Phi$ DxL(mm)	$\tan \delta$	Ripple current (A/rms105°C) (120Hz)	Rated Voltage (SurageVoltage) (V)	Cap ( $\mu$ F)	Case size $\Phi$ DxL(mm)	$\tan \delta$	Ripple current (A/rms105°C) (120Hz)
200(250)	220	22x25	0.15	1.00	400(450)	56	22x25	0.20	0.51
	270	22x30	0.15	1.10		68	22x30	0.20	0.56
		25x25	0.15	1.10			25x25	0.20	0.56
		330	22x30	0.15			1.20	82	22x35
	25x25		0.15	1.20		25x25	0.20		0.64
	390	22x35	0.15	1.30		100	22x35	0.20	0.69
		25x30	0.15	1.30			25x30	0.20	0.69
		30x25	0.15	1.30			120	22x40	0.20
	470	22x40	0.15	1.40		25x35		0.20	0.75
		25x35	0.15	1.40		30x25		0.20	0.75
		30x30	0.15	1.40		150	22x50	0.20	0.82
	560	22x45	0.15	1.50			25x40	0.20	0.82
		25x35	0.15	1.50			30x30	0.20	0.82
		30x30	0.15	1.50		180	25x45	0.20	0.90
	680	25x40	0.15	1.70			30x35	0.20	0.90
		30x35	0.15	1.70			35x25	0.20	0.90
820		25x50	0.15	2.00	220	25x50	0.20	1.00	
	30x40	0.15	2.00	30x40		0.20	1.00		
	35x30	0.15	2.00	35x30		0.20	1.00		
1000	30x45	0.15	2.22	270	30x45	0.20	1.15		
	35x35	0.15	2.20		35x35	0.20	1.11		
	1200	30x50	0.15		2.53	330	30x50	0.20	1.32
35x40		0.15	2.44	35x40	0.20		1.28		
1500	35x50	0.15	2.50	390	35x45	0.20	1.45		
		470	35x50	0.20	1.66				
250(300)	180	22x30	0.15	0.90	450(500)	39	22x25	0.20	0.37
		25x25	0.15	0.90		47	22x30	0.20	0.40
	220	22x35	0.15	1.00		56	22x35	0.20	0.47
		25x30	0.15	1.00			25x25	0.20	0.47
		22x40	0.15	1.10			68	22x40	0.20
	25x30	0.15	1.10	25x30		0.20		0.53	
	30x25	0.15	1.10	82		22x45		0.20	0.56
	330	22x45	0.15			1.20	25x35	0.20	0.56
		25x35	0.15			1.20	30x25	0.20	0.56
		30x30	0.15	1.20		100	22x50	0.20	0.67
	390	22x50	0.15	1.32			25x40	0.20	0.64
		25x40	0.15	1.23			30x30	0.20	0.64
		30x30	0.15	1.30		120	25x45	0.20	0.72
	470	25x45	0.15	1.42			30x30	0.20	0.72
		30x35	0.15	1.40			25x50	0.20	0.83
		35x30	0.15	1.40		150	30x40	0.20	0.81
	560	25x50	0.15	1.50			35x30	0.20	0.79
		30x40	0.15	1.58			180	30x45	0.20
		35x35	0.15	1.60		35x35		0.20	0.91
	680	30x45	0.15	1.83		220		30x50	0.20
		35x40	0.15	1.85			35x40	0.20	1.05
		820	30x50	0.15			2.09	270	35x45
	35x45		0.15	2.11		330	35x50	0.20	1.38
	1000	35x50	0.15	2.43					